


ICN-2P32-N

Brand Name	CENTIUM
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120-277
Input Frequency	50/60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	B.E.F.
* F17T8	1	17	0/-18	0.17	21	1.08	10	0.99	1.6	5.14
F17T8	2	17	0/-18	0.26	32	0.90	10	0.99	1.6	2.81
F25T8	1	25	0/-18	0.24	29	1.05	10	0.99	1.6	3.62
F25T8	2	25	0/-18	0.38	45	0.89	10	0.99	1.6	1.98
F32T8	1	32	0/-18	0.31	37	1.05	10	0.99	1.6	2.84
F32T8	2	32	0/-18	0.49	59	0.88	10	0.99	1.6	1.49
F32T8/ES (25W)	2	25	60/16	0.38	46	0.88	10	0.99	1.6	1.91
F32T8/ES (28W)	2	28	60/16	0.41	49	0.88	10	0.99	1.6	1.80
F32T8/ES (30W)	1	30	60/16	0.28	33	1.03	10	0.98	1.6	3.12
F32T8/ES (30W)	2	30	60/16	0.45	54	0.88	10	0.99	1.6	1.63

Wiring Diagram

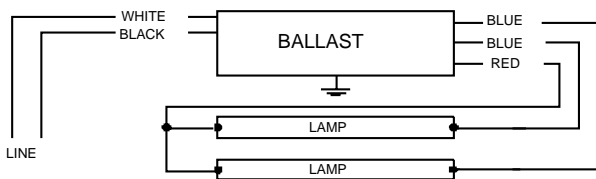


Diag. 64-A

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	24	61	Yellow/Blue		0
White	24	61	Blue/White		0
Blue	28	71.1	Brown		0
Red	45	114.3	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

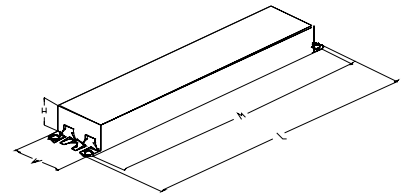

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
9.5 "	1.3 "	1.0 "	8.9 "
9 1/2	1 3/10	1	8 9/10
24.1 cm	3.3 cm	2.5 cm	22.6 cm

Revised 07/11/2008



Data is based upon tests performed by Advance Transformer in a controlled environment and representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.