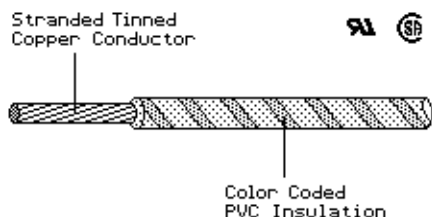


01-White	08-Orange	15-White/Blue
02-Black	09-Gray (Slate)	16-White/Brown
03-Red	10-Violet (Purple)	17-White/Orange
04-Green	11-White/Black	18-White/Gray
05-Yellow	12-White/Red	19-White/Violet
06-Blue	13-White/Green	28-Green/Yellow
07-Brown	14-White/Yellow	

**OPERATING TEMPERATURE:**

-20°C to 105°C

VOLTAGE RATING: 600 Volt**SPECIFICATIONS:**UL AWM Style 1015, UL UW-1
CSA TEW-105**PRODUCT DESCRIPTION:**Conductor: Stranded Tinned Copper
Insulation: Color-Coded PVC

Catalog No Code/Color	Farben Colors	AWG	mm ²	Draht x Ø Stranding	Insul.Thick.		AußenØ O.Dia.	Weight/km		UPE Packed
					Inches	mm		Cu (kg)	Net	
3070/xx	01-10+28	24	0.229	7x0.203	0.032	0.81	2.24	2	7	304/30m
3071/xx	01-10+28	22	0.357	7x0.254	0.032	0.81	2.38	3	9	304/30m
3073/xx	01-10+28	20	0.510	10x0.254	0.032	0.81	2.54	4	11	304/30m
3075/xx	01-10+28	18	0.816	16x0.254	0.032	0.81	2.85	7	15	304/30m
3077/xx	01-10+28	16	1.326	26x0.254	0.032	0.81	3.14	12	22	304/30m
3079/xx	01-10+28	14	2.091	41x0.254	0.032	0.81	3.61	19	30	304/30m
3080/xx	01-04	12	3.315	65x0.254	0.032	0.81	3.93	30	46	304/30m
3081/xx	01-04	10	5.370	105x0.254	0.032	0.81	4.83	48	67	304/30m