



Product Information

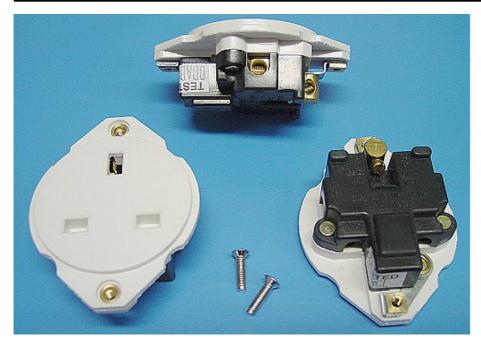



United Kingdom

Fixing holes drill to accept 4mm countersunk screws. Max panel thickness 2.5mm

13A/250V AC UNSWITCHED SOCKET OUTLET -- BS 1363A / 5433

1 gang round socket with side entry terminals and north/south fixings.

The 7259 panel mounting socket is suitable for use in any panel or trunking material up to 2.5mm thickness and can be incorporated into a minimum overall internal depth of only 22.5mm.

ORDERING INFORMATION:

Catalog No.	Color	Description	Weight/ea	Packed/VPE	EDP-No
7259	White	13A Unswitched Socket Outlet Panel Mount (2-Poles + Earth)	58g	10	119021