


ICN-2P32-SC

Brand Name	CENTIUM
Ballast Type	Electronic
Starting Method	Instant Start
Lamp Connection	Parallel
Input Voltage	120-277
Input Frequency	50/60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (°F/C)	Input Current (Amps)	Input Power (ANSI Watts)	Ballast Factor	MAX THD %	Power Factor	MAX Lamp Current Crest Factor	B.E.F.
F17T8	1	17	0/-18	0.09	22	1.07	15	0.95	1.7	4.86
F17T8	2	17	0/-18	0.13	33	0.93	15	0.97	1.7	2.82
F25T8	1	25	0/-18	0.11	29	1.06	15	0.97	1.7	3.66
F25T8	2	25	0/-18	0.18	48	0.91	10	0.98	1.7	1.90
F32T8	1	32	0/-18	0.14	36	1.03	15	0.97	1.7	2.86
* F32T8	2	32	0/-18	0.22	59	0.88	10	0.98	1.7	1.49
F32T8/ES (30W)	1	30	60/16	0.12	33	1.03	10	0.97	1.7	3.12
F32T8/ES (30W)	2	30	60/16	0.20	54	0.88	10	0.98	1.7	1.63
F40T8	1	40	32/00	0.15	42	1.00	10	0.98	1.7	2.38

Wiring Diagram

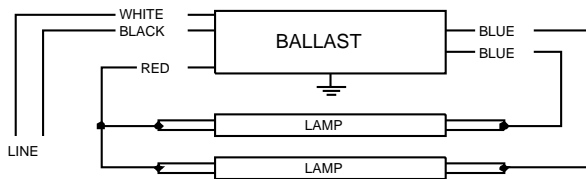


Diag. 64

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	25L	63.5	Yellow/Blue		0
White	25L	63.5	Blue/White		0
Blue	31R	78.7	Brown		0
Red	37L	94	Orange		0
Yellow		0	Orange/Black		0
Gray		0	Black/White		0
Violet		0	Red/White		0

Enclosure

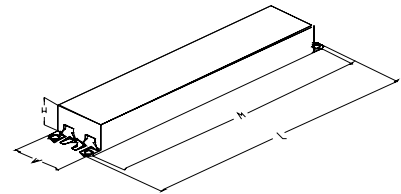

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
9.50 "	1.7 "	1.18 "	8.90 "
9 1/2	1 7/10	1 9/50	8 9/10
24.1 cm	4.3 cm	3 cm	22.6 cm

Revised 09/27/2005

