


Cat. No's indicates products of different manufacturers available.

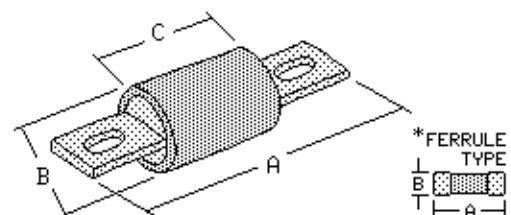

Indicated dimensions only refer to first catalog number listed.

UL

600 V AC

Very Fast  
Acting  
superflink

SEMICONDUCTOR FUSES

Interrupting rating AC  
200,000 Amps. RMS Sym.

Cat. No's	Nennstrom / Rated Current 1 - 2000 Amp.					UPE Packed	Dimensions = mm		
	A	B	C						
L60S	10	15	20	25	30	10	127.0	20.6	*FER
KBC	35	40	45	50	60	10	111.1	20.6	70.6
A60X CSF60X SF60X	70	80	90	100		5	113.5	27.0	73.8

NOTE: Intermediate & Further Amp. Sizes upon Request