





Dimensions  
refer to  
Class H  
Holders

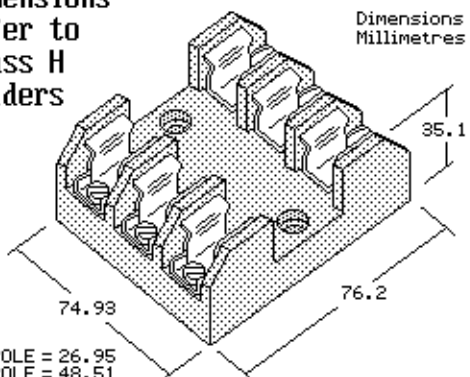

UL            CSA■  
250V AC 0-30A

Class R Holders  
Tested & Approved  
for 200.000 Amp.  
Interrupt.Capacity

Wire Connectors: S  SP  B 

FUSE HOLDERS, suitable for Class H, K and R\* Fuses (\*or use Class R Holders)

- Base, High Impact Thermoplastic, 125°C
- Patented Cool Clip(R) Design
- Clip, Copper Alloy, Tin Plated

Fuse Size:  
(Ø 14.3 x 50.8)mm

No.of Poles	Catalog Numbers		Class R only	Wire Connector	Copper Wire Range (AWG)	UPE Packed
	Standard	Reinforced				
1	F30A1S■	RF30A1S■	R30A1S■	Screw Connector	10 - 22	50
2	F30A2S■	RF30A2S■	R30A2S■	Screw Connector	10 - 22	25
3	F30A3S■	RF30A3S■	R30A3S■	Screw Connector	10 - 22	20
1	F30A1SP■	RF30A1SP■	R30A1SP■	Sems Pressure Screw	10 - 14	50
2	F30A2SP■	RF30A2SP■	R30A2SP■	Sems Pressure Screw	10 - 14	25
3	F30A3SP■	RF30A3SP■	R30A3SP■	Sems Pressure Screw	10 - 14	20
1	F30A1B■	RF30A1B■	R30A1B■	Box Connector	6 - 14	50
2	F30A2B■	RF30A2B■	R30A2B■	Box Connector	6 - 14	25
3	F30A3B■	RF30A3B■	R30A3B■	Box Connector	6 - 14	20