


G-Sicherungseinsätze, Glasrohr
 Dimensions (32x6.3)mm (1 1/4x1/4)"

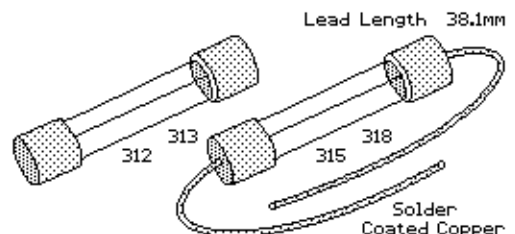

Cat.No 312/318 flink / Fast Acting
 Cat.No 313/315 träge / Time Delay

UL 198G CSA# C22.2

3AG ELECTRONIC FUSES
 Glass Tube Fuse Link

313/315 CSA .010-8A
 10-30A (32V AC) Upon
 Request

UPE/Packed 100

| Cat.No's | VAC | (Zusatz) Nennstrom Amp | | | | | (Suffix) Rated Current Amp | | | | |
|----------|-----|------------------------|------|------|------|------|----------------------------|------|------|------|------|
| | | .010 | .031 | .062 | .100 | .125 | .150 | .175 | .187 | .200 | .250 |
| 312# | 250 | .010 | .031 | .062 | .100 | .125 | .150 | .175 | .187 | .200 | .250 |
| 318# | 250 | .300 | .375 | .500 | .600 | .750 | 001. | 1.25 | 01.5 | 01.6 | 1.75 |
| | 250 | 002. | 2.25 | 02.5 | 003. | 004. | 005. | 006. | 007. | 008. | 010. |
| 313## | 250 | .010 | .031 | .040 | .062 | .100 | .125 | .150 | .175 | .187 | .200 |
| 315## | 250 | .250 | .300 | .375 | .400 | .500 | .600 | .700 | .750 | .800 | 001. |
| | 250 | 01.2 | 1.25 | 01.5 | 01.6 | 01.8 | 002. | 2.25 | 02.5 | 02.8 | 003. |
| | 250 | 03.2 | 004. | 005. | 6.25 | 007. | 008. | | | | |