


Dimensions:

(H212.7 x W212.7 x D123.8)mm

UL Listed (E30816) CSA Certified (LR27196)

## ECONOMY QUARTZ FLOODLIGHT FIXTURE

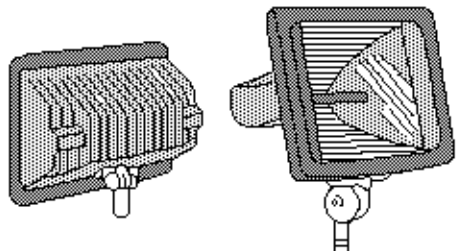

Housing: Die-cast aluminum with cast-in fins for efficient heat dissipation. Adjustable mounting with 1/2" NPS threaded knuckle. Hardware is corrosion resistant. Socket design eliminates binding while ensuring efficient heat dissipation. Gray finish.

Reflector: One-piece parabolic aluminum reflector.

Lens: Thermal shock, impact-resistant glass lens held in place by 4 corrosion-resistant pre-galvanized clips. Fixture can be aimed (glass side up) without hazard of breaking hot lens while fixture is operating. Lens is sealed to housing by high temperature silicone rubber gasket.

Lamp (Clear, Horiz., Bulb T3, Base R7s) not included - order separately.

| Catalog No. / Description | Watts   | Volts 60Hz | Wght/ea | Ref.No. | EDP#   | UPE/Pack |
|---------------------------|---------|------------|---------|---------|--------|----------|
| QM500E Economy Fixture    | 300-500 | 120, 130   | 1362g   | 2U531   | 112466 | 6/1      |
| 43703 Q300T3/CL ANSI: EHM | 300W    | 120V       | 45g     | 2U529   | 112465 | 6/1      |
| 23731 Q500T3/CL ANSI: FCL | 500W    | 120V       | 45g     | 2U384   | 112663 | 12/1     |