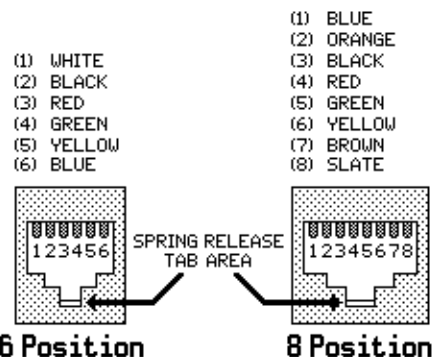
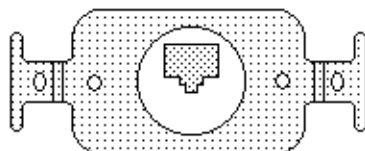


Meets FCC Part 68 requirements

UL Listed
CSA Certified

Type 105 Single Flush Mount Modular Jacks with 110-Type Termination

The 105 single-port flush mount jack fits a standard single opening (35.7mm diameter) electrical wallplate. It is available in 4-, 6-, or 8-conductor configurations for voice and data, with the 8-conductor keyed version typically used for data. Mounts easily in standard single-, double-, or multi-gang electrical boxes, most floor monuments, and many cellular or raised floor boxes. Installs quickly using industry standard 110-type insulation displacement connectors for 22-26 AWG inside wiring.

Cat# IVORY	Cat# WHITE	Cat# GRAY	Description
41054-IDD	---	---	One 6-Position, 4-Conductor Jack
41056-IDD	41056-WDD	---	One 6-Position, 6-Conductor Jack
41058-IDD	---	---	One 8-Position, 8-Conductor Jack, USOC
41058-IDA	41058-WDA	41058-GDA	One 8-Pos, 8-Conductor Jack, T568B (WECO)
41058-IDB	---	---	One 8-Position, 8-Conductor Keyed Jack, T568B (WECO), with "DATA" Designation