

Rewireable Mains Line Plug, Straight Cable Entry

Used in Country: Brazil

Specifications

- Ratings: Rated Current 10 Amp, Rated Voltage 250 Volt AC
- Standards: ABNT NBR NM 60884-1/2004; NBR 14136/2002 (based on IEC 60906-1)
- Certification No.: TÜV 16.2239 (083.1420.0, 083.2141.0) (16/12/2016 recertified original no. MC,DPC-7752 Revision 11)
- Material of Terminals: Brass
- Material of Cover/Housing and Carrying Parts: Thermoplatic
- Standard Colors: #2141-BK Black, #1420-LG Light Gray (Further colors available, depending on quantity.)
- Pins Diameter: Ø 4.8 mm, Two Pins (20A)
- Poles and Wires: 2-poles 2-wire NON-grounded (2POL)
- Rewireable, for Supply Line: 2 Conductor, 1.50 mm² to 2.5 mm²
- Special Features: With Safety Lock Feature

Packing Information


• Carton Quantity: 25

Carton Dimensions: (19x15x15)cm
Carton Gross Weight: 0.656 kg
Unit Packaging: Flow Pack of 1
Unit net Weight: 0.021 kg

• Unit Shipping Weight: 0.035 kg



Plug 2-Pole 2-Wire NON-Grounded 20A/250V~

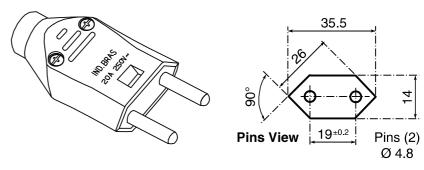

Connections according to the specifications of the device or product.

