




IP66 suitable when used with optional metal clad O-ring.


4801-2

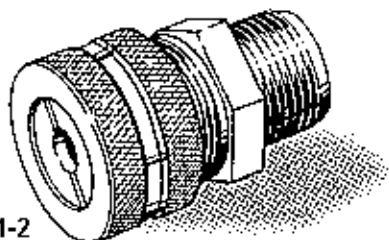

Dimensions = mm

\* A/C = Across Corners

\* A/F = Across Flats

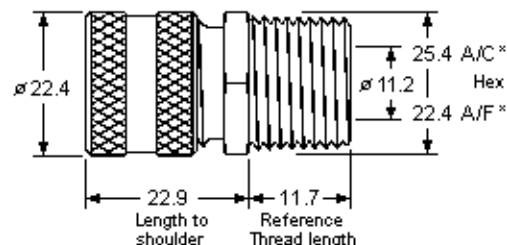

- Aluminum construction provides a corrosion-resistant installation.
- GOTCHA ring is color-coded for sizing identification.
- Neoprene grommet.
- Knurled compression nut allows the fitting to be hand tightened to UL requirements.
- Operating Temperature: Due to the limiting factors of nylon & neoprene, any complete cord connectors with a GOTCHA ring will continuously perform in the range of  $-34^{\circ}\text{C}$  to  $+107^{\circ}\text{C}$ .
- These cord connectors are suitable for use in hazardous locations.
- UL Listed in accordance with Standard 514B; CSA Certified.

Catalog No.	NPT	Cable $\varnothing$	Color Code	Size	Wght/ea	UPE/Pack	EDP-No
4801-2	1/2"	4.7 - 6.4	Red	F1	23g	25	117020
4801-3	1/2"	6.4 - 7.9	Black	F1	23g	25	117041
4801-4	1/2"	7.9 - 9.5	White	F1	23g	25	117042
4801-5	1/2"	9.5 - 11.1	Blue	F1	23g	25	117043

Further connectors and complete description can be found in Document No: 9264