



15 AMP Plugs, Angle Plugs, Armored Plugs and Connectors

15 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	515PV	Yellow			NEMA 5-15P
Armored Grounding Plug	515PA	Yellow Steel Armor			
Rubber Grounding Plug	515PR	Black			NEMA 5-15R
PVC Angle Grounding Plug	515AN	White	.245 – .655	No. 18-3 through No. 12-3 cords	
PVC Grounding Connector	515CV	Yellow	6.2-16.6mm		NEMA 5-15R
Armored Grounding Connector	515CA	Yellow Steel Armor			
Rubber Grounding Connector	515CR	Black			NEMA 5-15R
Tru-Link™ Connector	515LR	Black			
Motor Base Inlet	5239	Black		No. 10 Max. copper or copper clad	

15 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	615PV	Yellow			NEMA 6-15P
Armored Grounding Plug	615PA	Yellow Steel Armor			
Armored Grounding Connector	615CA	Yellow Steel Armor	.245 – .655	No. 18-3 through No. 12-3 cords	NEMA 6-15R
Rubber Grounding Connector	615CR	Black	6.2-16.6mm		
Rubber Back Grounding Plug	615PR	Black			NEMA 6-15R
Motor Base Inlet	5240	Black		No. 10 Max. copper or copper clad	

All devices are UL Listed and CSA Certified.

SPECIFICATIONS & FEATURES

- Triple-drive head screws — Standard, Phillips, Robertson
- NEMA configuration number & rating molded on face of device for easy identification
- Rubber body is dirt and moisture resistant
- Deep-slotted, backed out terminal screws draw backwire clamps securely for maximum conductivity
- Husk & module keyed for easy alignment during wiring
- Built-in cord grip adjusts automatically for use with No. 18-3 through No. 12-3 cords

PVC Plugs & Connectors

- Rugged PVC body resists moisture and chemicals; suited for outdoor cords
- Unique dimpled body design provides a secure grip
- Speed-thread assembly screws tighten with just a few quick turns

Armored Plugs & Connectors

- Ideal for shops, garages and rough-duty work with hard floors
- Two piece strain-relief clamp center cord for neat installation

Rubber-Back Plugs & Connectors

- Designed to stand up to rough use
- No internal metal parts exposed
- Elastomeric husk provides added protection against dirt and moisture entry into the back wire port
- Designed to operate in the widest possible temperature range

Tru-Link™ Connector

- Locking mechanism automatically secures straight blade plug
- Easy-release tabs disconnect plug



TESTING & CODE COMPLIANCE

- Meet NEMA requirements
- UL Listed (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94



Operating Temperature: -40°C to 65°C.

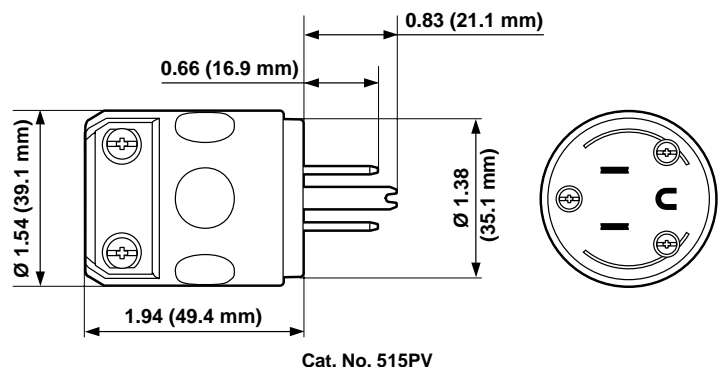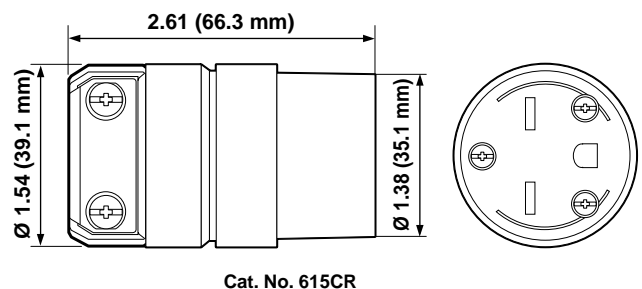

20 AMP Plugs, Angle Plugs, Armored Plugs and Connectors



20 AMP 125V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	520PV	Yellow			
Armored Grounding Plug	520PA	Yellow Steel Armor			
PVC Grounding Connector	520CV	Yellow			
Armored Grounding Connector	520CA	Yellow Steel Armor	.245 - .655 6.2-16.6mm	No.18-3 through No. 12-3 cords	
Rubber Back Grounding Plug	520PR	Black			
Rubber Back Grounding Connector	520CR	Black			

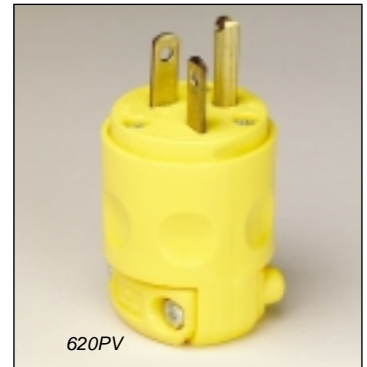



20 AMP 250V 2-Pole 3-Wire Grounding

DESCRIPTION	CAT. NO.	COLOR	CORD DIA. (inches)	WIRE GAUGE (stranded)	NEMA CONFIG.
PVC Grounding Plug	620PV	Yellow			
Armored Grounding Plug	620PA	Yellow Steel Armor			
PVC Grounding Connector	620CV	Yellow			
Armored Grounding Connector	620CA	Yellow Steel Armor	.245 - .655 6.2-16.6mm	No.18-3 through No. 12-3 cords	
Rubber Back Grounding Plug	620PR	Black			
Rubber Back Grounding Connector	620CR	Black			
Motor Base Inlet	5829	Black		No. 10 Max. copper or copper clad	

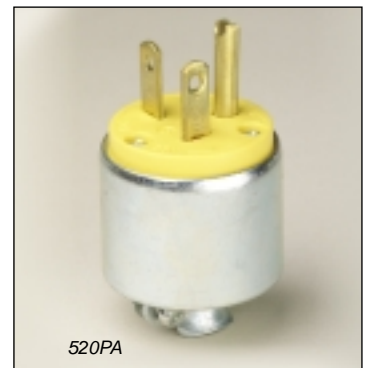

All devices are UL Listed and CSA Certified.

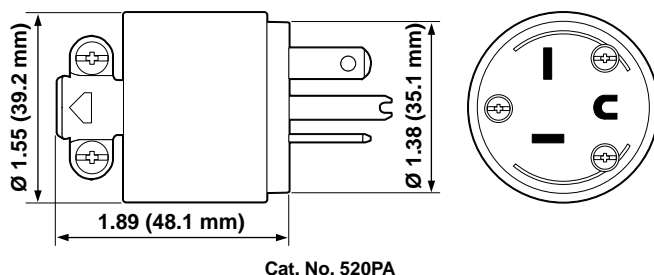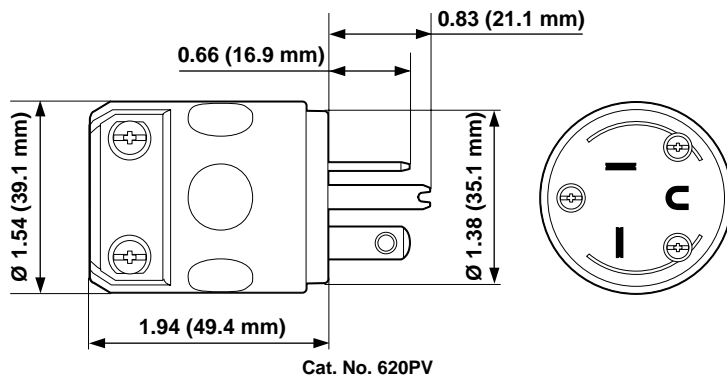

SPECIFICATIONS & FEATURES

- Triple-drive head screws — Standard, Philips, Robertson
- NEMA configuration number & rating molded on device for easy identification
- Dirt and moisture resistant
- Deep-slotted, backed out terminal screws draw backwire clamps securely for maximum conductivity
- Husk & module keyed for easy alignment during wiring
- Built-in cord grip adjusts automatically for use with No. 18-3 through No. 12-3 cords

PVC Plugs & Connectors

- Rugged PVC body resists moisture and chemicals; suited for outdoor cords
- Unique dimpled body design provides a secure grip
- Speed-thread assembly screws tighten with just a few quick turns

Armored Plugs & Connectors

- Ideal for shops, garages and rough-duty work with hard floors
- Two piece strain-relief clamp center cord for neat installation

TESTING & CODE COMPLIANCE

- Meet NEMA requirements
- UL Listed (File #E-13393)
- CSA Certified (File #LR-406)
- NOM Certified (#057)
- Backed by a Limited 10-Year Warranty

MATERIAL CHARACTERISTICS

Environmental: Flammability, Rated V2 per UL 94
Operating Temperature: -40°C to 65°C.