

## 3-Conductor Detachable Power Supply



Molded PVC  
Grounding Plug  
NEMA 5-15P UC-004



Molded PVC  
Receptacle  
IEC 60320/C13 UC-005

### TYPE SVT



**Foil Shielded, PVC Jacketed, 60°C**

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>5850-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.263	100	43

*Braided Shield is available upon request as a custom item  
Standard tied loop hank*



Molded PVC  
Grounding Plug  
NEMA 5-15P UC-004



Molded PVC  
Receptacle  
IEC 60320/C13 UC-005

### TYPE SJT



**Foil Shielded, PVC Jacketed, 60°C**

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>6850-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.343	100	53
<b>6850-03M-BB</b>	10A-125V	18/3(41x34)	CEE	9.8/3.0	.343	50	39
<b>6650-02M-BB</b>	13A-125V	16/3(65x34)	CEE	6.6/2.0	.360	100	63
<b>6650-03M-BB</b>	13A-125V	16/3(65x34)	CEE	9.8/3.0	.360	50	44
<b>6450-02M-BB</b>	15A-125V	14/3(41x30)	CEE	6.6/2.0	.390	50	38
<b>6450-03M-BB</b>	15A-125V	14/3(41x30)	CEE	9.8/3.0	.390	50	54

*Braided Shield is available upon request as a custom item  
Standard bulk packaged*

**3-Conductor Detachable Power Supply**



Molded PVC Grounding Plug  
NEMA 5-15P UC-004



Molded PVC Receptacle  
IEC 60320/C13 UC-005

**TYPE SVT**



*Unshielded, PVC Jacketed, 60°C*

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>3850-76I-BB</b>	10A-125V	18/3(41x34)	CEE	7.5/2.3	.255	100	43
<b>3850-76I-BB/NA</b>	10A-125V	18/3(41x34)	NA	7.5/2.3	.255	100	43

*Standard tied loop hank*



Molded PVC Grounding Plug  
NEMA 5-15P UC-004



Molded PVC Receptacle  
IEC 60320/C13 UC-005

**TYPE SJT**




*Unshielded, PVC Jacketed, 60°C*

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>4850-25M-BB</b>	10A-125V	18/3(41x34)	CEE	8.2/2.5	.307	75	43
<b>4650-76I-BB</b>	13A-125V	16/3(26x30)	CEE	7.5/2.3	.334	50	33
<b>4450-02M-BB</b>	15A-125V	14/3(41x30)	CEE	6.6/2.0	.375	50	37

*Standard tied loop hank*



Molded PVC Grounding Plug  
NEMA 5-15P UC-004

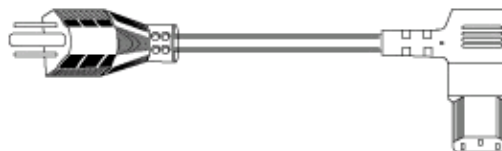

Molded PVC Right-Angle Receptacle  
IEC 60320/C13 UC-006

**TYPE SVT**



*Foil Shielded, PVC Jacketed, 60°C*


PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>5892-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.263	100	43

*Braided Shield is available upon request as a custom item  
Standard tied loop hank*

## 3-Conductor Detachable Power Supply



Molded PVC  
Grounding Plug  
NEMA 5-15P UC-004

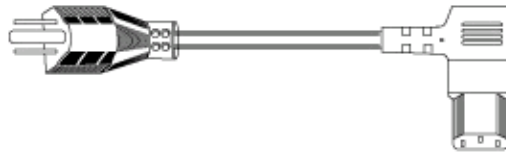

Molded PVC Right-Angle  
Receptacle  
IEC 60320/C13 UC-006

### TYPE SJT




**Foil Shielded, PVC Jacketed, 60°C**

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>6892-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.343	100	54
<b>6692-02M-BB</b>	13A-125V	16/3(65x34)	CEE	6.6/2.0	.360	100	57

*Braided Shield is available upon request as a custom item  
Standard tied loop hank*



Molded PVC  
Grounding Plug  
NEMA 5-15P UC-004

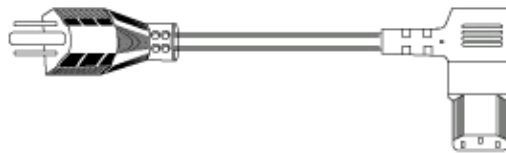

Molded PVC Right-Angle  
Receptacle  
IEC 60320/C13 UC-006

### TYPE SVT




**Unshielded, PVC Jacketed, 60°C**

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>3892-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.225	100	38
<b>3892-25M-GG</b>	10A-125V	18/3(41x34)	CEE	8.2/2.5	.225	1000	380

*Standard tied loop hank*



Molded PVC  
Grounding Plug  
NEMA 5-15P UC-004

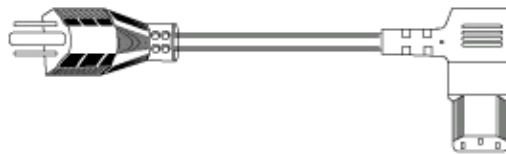

Molded PVC Right-Angle  
Receptacle  
IEC 60320/C13 UC-006

### TYPE SJT



**Unshielded, PVC Jacketed, 60°C**

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
<b>4892-02M-BB</b>	10A-125V	18/3(41x34)	CEE	6.6/2.0	.307	100	58.6
<b>4692-02M-BB</b>	13A-125V	16/3(26x30)	CEE	6.6/2.0	.334	100	57

*Standard tied loop hank*

## 3-Conductor Detachable Power Supply



Molded PVC  
Grounding Plug  
NEMA 6-20P UC-07H



Molded PVC  
Receptacle  
IEC 60320/C19 UC-033


### TYPE SJT



*Unshielded, PVC Jacketed, 60°C*

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
4460-76I-BB	15A-250V	14/3(41x30)	CEE	7.5/2.3	.375	50	42
4260-76I-BB	20A-250V	12/3(65x30)	CEE	7.5/2.3	.429	25	33

*Standard tied loop hank*



Molded PVC  
Grounding Plug  
NEMA 6-20P UC-07H



Molded PVC Right-Angle  
Receptacle  
IEC 60320/C19 UC-033R

### TYPE SJT



*Unshielded, PVC Jacketed, 60°C*

PART NUMBER	RATING	AWG SIZE & STRANDING	COLOR CODE	LENGTH Ft/Mtrs.	NOM. O.D. Inches	STD. PKG.	PKG. WT. lbs.
4462-76I-BB	15A-250V	14/3(41x30)	CEE	7.5/2.3	.375	50	54
4262-76I-BB	20A-250V	12/3(65x30)	CEE	7.5/2.3	.429	25	35

*Standard tied loop hank*