


RoHS



HSK-K

Metric




- Material:** PA (Nylon) V0 according to UL 94
- Seal:** Buna-N
- Protection:** IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range
only with optional O-Ring
- Operating Temperature:** -40 °C – 100 °C (-40 °F – 212 °F)
- Colors:**
 - grey RAL 7035
 - black RAL 9005
 - blue RAL 5012 for the intrinsic safety "i"

AG	$\frac{1}{2}k$ mm	GL mm	H mm	$\frac{1}{2}k$ mm	Number grey	Number black	Number blue
M 12 x 1,5	3 - 6,5	8	21	15	1.209.1200.50	1.209.1201.50	1.209.1202.50
M 12 x 1,5	2 - 5	8	21	15	1.209.1200.51	1.209.1201.51	1.209.1202.51
M 16 x 1,5	4 - 8	8	22	19	1.209.1600.50	1.209.1601.50	1.209.1602.50
M 16 x 1,5	2 - 6	8	22	19	1.209.1600.51	1.209.1601.51	1.209.1602.51
M 16 x 1,5	5 - 10	8	25	22	1.219.1600.50	1.219.1601.50	1.219.1602.50
M 20 x 1,5	6 - 12	9	27	24	1.209.2000.50	1.209.2001.50	1.209.2002.50
M 20 x 1,5	5 - 9	9	27	24	1.209.2000.51	1.209.2001.51	1.209.2002.51
M 20 x 1,5	10 - 14	9	28	27	1.219.2000.50	1.219.2001.50	1.219.2002.50
M 25 x 1,5	13 - 18	11	31	33	1.209.2500.50	1.209.2501.50	1.209.2502.50
M 25 x 1,5	9 - 16	11	31	33	1.209.2500.51	1.209.2501.51	1.209.2502.51
M 32 x 1,5	18 - 25	11	39	42	1.209.3200.50	1.209.3201.50	1.209.3202.50
M 32 x 1,5	13 - 20	11	39	42	1.209.3200.51	1.209.3201.51	1.209.3202.51
M 40 x 1,5	22 - 32	13	48	53	1.209.4000.50	1.209.4001.50	1.209.4002.50
M 40 x 1,5	20 - 26	13	48	53	1.209.4000.51	1.209.4001.51	1.209.4002.51
M 50 x 1,5	32 - 38	13	49	60	1.209.5000.50	1.209.5001.50	1.209.5002.50
M 50 x 1,5	25 - 31	13	49	60	1.209.5000.51	1.209.5001.51	1.209.5002.51
M 63 x 1,5	37 - 44	14	49	65 / 68	1.209.6300.50	1.209.6301.50	1.209.6302.50
M 63 x 1,5	29 - 35	14	49	65 / 68	1.209.6300.51	1.209.6301.51	1.209.6302.51

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com



RoHS



HSK-K Metric-elongated

- Material:** PA (Nylon) V0 according to UL 94
- Seal:** Buna-N
- Protection:** IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range
only with optional O-Ring
- Operating Temperature:** -40 °C – 100 °C (-40 °F – 212 °F)
- Colors:**
 - grey RAL 7035
 - black RAL 9005
 - blue RAL 5012 for the intrinsic safety "i"




AG	$\frac{1}{2}$ " mm	GL mm	H mm	$\frac{1}{4}$ " mm	Number grey	Number black	Number blue
M 12 x 1,5	3 - 6,5	15	21	15	1.209.1200.30	1.209.1201.30	1.209.1202.30
M 12 x 1,5	2 - 5	15	21	15	1.209.1200.31	1.209.1201.31	1.209.1202.31
M 16 x 1,5	4 - 8	15	22	19	1.209.1600.30	1.209.1601.30	1.209.1602.30
M 16 x 1,5	2 - 6	15	22	19	1.209.1600.31	1.209.1601.31	1.209.1602.31
M 16 x 1,5	5 - 10	15	25	22	1.219.1600.30	1.219.1601.30	1.219.1602.30
M 20 x 1,5	6 - 12	15	27	24	1.209.2000.30	1.209.2001.30	1.209.2002.30
M 20 x 1,5	5 - 9	15	27	24	1.209.2000.31	1.209.2001.31	1.209.2002.31
M 20 x 1,5	10 - 14	15	28	27	1.219.2000.30	1.219.2001.30	1.219.2002.30
M 25 x 1,5	13 - 18	15	31	33	1.209.2500.30	1.209.2501.30	1.209.2502.30
M 25 x 1,5	9 - 16	15	31	33	1.209.2500.31	1.209.2501.31	1.209.2502.31
M 32 x 1,5	18 - 25	15	39	42	1.209.3200.30	1.209.3201.30	1.209.3202.30
M 32 x 1,5	13 - 20	15	39	42	1.209.3200.31	1.209.3201.31	1.209.3202.31
M 40 x 1,5	22 - 32	18	48	53	1.209.4000.30	1.209.4001.30	1.209.4002.30
M 40 x 1,5	20 - 26	18	48	53	1.209.4000.31	1.209.4001.31	1.209.4002.31
M 50 x 1,5	32 - 38	18	49	60	1.209.5000.30	1.209.5001.30	1.209.5002.30
M 50 x 1,5	25 - 31	18	49	60	1.209.5000.31	1.209.5001.31	1.209.5002.31
M 63 x 1,5	37 - 44	18	49	65 / 68	1.209.6300.30	1.209.6301.30	1.209.6302.30
M 63 x 1,5	29 - 35	18	49	65 / 68	1.209.6300.31	1.209.6301.31	1.209.6302.31

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com



RoHS



HSK-K

PG



Material: PA (Nylon) V0 according to UL 94
Seal: Buna-N
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range
 only with optional O-Ring

Operating Temperature: -40 °C – 100 °C (-40 °F – 212 °F)


Colors:
 grey RAL 7035
 black RAL 9005
 blue RAL 5012 for the intrinsic safety "i"

AG	$\varnothing k$ mm	GL mm	H mm	\varnothing mm	Number grey	Number black	Number blue
PG 7	3 - 6,5	8	21	15	1.209.0700.14	1.209.0701.14	1.209.0702.14
PG 7	2 - 5	8	21	15	1.209.0700.15	1.209.0701.15	1.209.0702.15
PG 9	4 - 8	8	22	19	1.209.0900.14	1.209.0901.14	1.209.0902.14
PG 9	2 - 6	8	22	19	1.209.0900.15	1.209.0901.15	1.209.0902.15
PG 11	5 - 10	8	25	22	1.209.1100.14	1.209.1101.14	1.209.1102.14
PG 11	3 - 7	8	25	22	1.209.1100.15	1.209.1101.15	1.209.1102.15
PG 13,5	6 - 12	9	27	24	1.209.1300.14	1.209.1301.14	1.209.1302.14
PG 13,5	5 - 9	9	27	24	1.209.1300.15	1.209.1301.15	1.209.1302.15
PG 16	10 - 14	10	28	27	1.209.1600.14	1.209.1601.14	1.209.1602.14
PG 16	7 - 12	10	28	27	1.209.1600.15	1.209.1601.15	1.209.1602.15
PG 21	13 - 18	11	31	33	1.209.2100.14	1.209.2101.14	1.209.2102.14
PG 21	9 - 16	11	31	33	1.209.2100.15	1.209.2101.15	1.209.2102.15
PG 29	18 - 25	11	39	42	1.209.2900.14	1.209.2901.14	1.209.2902.14
PG 29	13 - 20	11	39	42	1.209.2900.15	1.209.2901.15	1.209.2902.15
PG 36	22 - 32	13	48	53	1.209.3600.14	1.209.3601.14	1.209.3602.14
PG 36	20 - 26	13	48	53	1.209.3600.15	1.209.3601.15	1.209.3602.15
PG 42	32 - 38	13	49	60	1.209.4200.14	1.209.4201.14	1.209.4202.14
PG 42	25 - 31	13	49	60	1.209.4200.15	1.209.4201.15	1.209.4202.15
PG 48	37 - 44	14	49	65	1.209.4800.14	1.209.4801.14	1.209.4802.14
PG 48	29 - 35	14	49	65	1.209.4800.15	1.209.4801.15	1.209.4802.15

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com



RoHS



HSK-K

PG-elongated




- Material:** PA (Nylon) V0 according to UL 94
- Seal:** Buna-N
- Protection:** IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range
only with optional O-Ring
- Operating Temperature:** -40 °C – 100 °C (-40 °F – 212 °F)
- Colors:**
 - grey RAL 7035
 - black RAL 9005
 - blue RAL 5012 for the intrinsic safety "i"

AG	$\varnothing k$ mm	GL mm	H mm	\varnothing mm	Number grey	Number black	Number blue
PG 7	3 - 6,5	15	21	15	1.209.0700.60	1.209.0701.60	1.209.0702.60
PG 7	2 - 5	15	21	15	1.209.0700.61	1.209.0701.61	1.209.0702.61
PG 9	4 - 8	15	22	19	1.209.0900.60	1.209.0901.60	1.209.0902.60
PG 9	2 - 6	15	22	19	1.209.0900.61	1.209.0901.61	1.209.0902.61
PG 11	5 - 10	15	25	22	1.209.1100.60	1.209.1101.60	1.209.1102.60
PG 11	3 - 7	15	25	22	1.209.1100.61	1.209.1101.61	1.209.1102.61
PG 13,5	6 - 12	15	27	24	1.209.1300.60	1.209.1301.60	1.209.1302.60
PG 13,5	5 - 9	15	27	24	1.209.1300.61	1.209.1301.61	1.209.1302.61
PG 16	10 - 14	15	28	27	1.209.1600.60	1.209.1601.60	1.209.1602.60
PG 16	7 - 12	15	28	27	1.209.1600.61	1.209.1601.61	1.209.1602.61
PG 21	13 - 18	15	31	33	1.209.2100.60	1.209.2101.60	1.209.2102.60
PG 21	9 - 16	15	31	33	1.209.2100.61	1.209.2101.61	1.209.2102.61
PG 29	18 - 25	15	39	42	1.209.2900.60	1.209.2901.60	1.209.2902.60
PG 29	13 - 20	15	39	42	1.209.2900.61	1.209.2901.61	1.209.2902.61
PG 36	22 - 32	18	48	53	1.209.3600.60	1.209.3601.60	1.209.3602.60
PG 36	20 - 26	18	48	53	1.209.3600.61	1.209.3601.61	1.209.3602.61
PG 42	32 - 38	18	49	60	1.209.4200.60	1.209.4201.60	1.209.4202.60
PG 42	25 - 31	18	49	60	1.209.4200.61	1.209.4201.61	1.209.4202.61
PG 48	37 - 44	18	49	65	1.209.4800.60	1.209.4801.60	1.209.4802.60
PG 48	29 - 35	18	49	65	1.209.4800.61	1.209.4801.61	1.209.4802.61

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com



RoHS



HSK-K

NPT



- Material:** PA (Nylon) V0 according to UL 94
- Seal:** Buna-N
- Protection:** IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
within the specified clamping range
only with optional O-Ring
- Operating Temperature:** -40 °C – 100 °C (-40 °F – 212 °F)
- Colors:**
 - grey RAL 7035
 - black RAL 9005
 - blue RAL 5012 for the intrinsic safety "i"


AG	\varnothing_k mm	GL mm	H mm	\varnothing_k mm	Number grey	Number black	Number blue
3/8" NPT	4 - 8	15	22	22 / 19	1.209.3800.70	1.209.3801.70	1.209.3802.70
3/8" NPT	2 - 6	15	22	22 / 19	1.209.3800.71	1.209.3801.71	1.209.3802.71
1/2" NPT	6 - 12	13	27	24	1.209.1200.70	1.209.1201.70	1.209.1202.70
1/2" NPT	5 - 9	13	27	24	1.209.1200.71	1.209.1201.71	1.209.1202.71
1/2" NPT/16	10 - 14	13	28	27	1.209.1216.70	1.209.1217.70	1.209.1218.70
1/2" NPT/16	7 - 12	13	28	27	1.209.1216.71	1.209.1217.71	1.209.1218.71
3/4" NPT	13 - 18	14	31	33	1.209.3400.70	1.209.3401.70	1.209.3402.70
3/4" NPT	9 - 16	14	31	33	1.209.3400.71	1.209.3401.71	1.209.3402.71
1" NPT	18 - 25	19	39	42	1.209.1000.70	1.209.1001.70	1.209.1002.70
1" NPT	13 - 20	19	39	42	1.209.1000.71	1.209.1001.71	1.209.1002.71
1 1/4" NPT	18 - 25	16	39	46 / 42	1.209.5400.70	1.209.5401.70	1.209.5402.70
1 1/4" NPT	13 - 20	16	39	46 / 42	1.209.5400.71	1.209.5401.71	1.209.5402.71
1 1/2" NPT	22 - 32	20	48	53	1.209.6400.70	1.209.6401.70	1.209.6402.70
1 1/2" NPT	20 - 26	20	48	53	1.209.6400.71	1.209.6401.71	1.209.6402.71

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com





Metric Versions only!



HSK-K FLAKA Metric / PG / NPT

Material: PA (Nylon) V0 according to UL 94
Seal: Elastomer
Operating Temperature: -40 °C – 100 °C (-40 °F – 212 °F)
Colors: grey RAL 7035
 black RAL 9005

These inserts are examples,
 other inserts available upon request
 HSK-K-FLAKA for ASI-Bus available
 Installation instructions available




AG	GL mm	H mm	mm	b x h mm	Number grey	Number black	b x h mm	Number grey	Number black
M 20 x 1,5	9	28	27	11,5 x 5	1.587.2016.50	1.587.2016.51	12 x 7	1.587.2017.50	1.587.2017.51
M 20 x 1,5	9	28	27	14 x 6	1.587.2018.50	1.587.2018.51			
M 25 x 1,5	11	31	33	14 x 6	1.587.2500.50	1.587.2500.51	14 x 7	1.587.2501.50	1.587.2501.51
M 32 x 1,5	11	39	42	22 x 8	1.587.3200.50	1.587.3200.51			
M 40 x 1,5	13	48	53	28,5 x 10	1.587.4000.50	1.587.4000.51	29 x 5,5	1.587.4001.50	1.587.4001.51
M 40 x 1,5	13	48	53	30,5 x 12	1.587.4002.50	1.587.4002.51	31 x 7,5	1.587.4003.50	1.587.4003.51
M 50 x 1,5	13	49	60	33,5 x 11,5	1.587.5000.50	1.587.5000.51			
M 63 x 1,5	14	49	65 / 68	38 x 12	1.587.6300.50	1.587.6301.51			
PG 16	10	28	27	11,5 x 5	1.587.1600.00	1.587.1600.01	12 x 7	1.587.1601.00	1.587.1601.01
PG 16	10	28	27	14 x 6	1.587.1602.00	1.587.1602.01			
PG 21	11	31	33	14 x 6	1.587.2100.00	1.587.2100.01	14 x 7	1.587.2101.00	1.587.2101.01
PG 29	11	39	42	22 x 8	1.587.2900.00	1.587.2900.01			
PG 36	13	48	53	28,5 x 10	1.587.3600.00	1.587.3600.01	29 x 5,5	1.587.3601.00	1.587.3601.01
PG 36	13	48	53	30,5 x 12	1.587.3602.00	1.587.3602.01	31 x 7,5	1.587.3603.00	1.587.3603.01
PG 42	13	49	60	33,5 x 11,5	1.587.4200.00	1.587.4200.01			
PG 48	14	49	65	38 x 12	1.587.4800.00	1.587.4800.01			
1/2" NPT/16	13	28	27	11,5 x 5,5	1.587.1216.70	1.587.1216.71	12 x 7	1.587.1217.70	1.587.1217.71
1/2" NPT/16	13	28	27	14 x 6	1.587.1218.70	1.587.1218.71			
3/4" NPT	14	31	33	14 x 6	1.587.3400.70	1.587.3400.71			
1" NPT	19	39	42	22 x 8	1.587.1000.70	1.587.1000.71			
1 1/4" NPT	16	39	42 / 46	22 x 8	1.587.5400.70	1.587.5400.71			
1 1/2" NPT	20	48	53	28,5 x 10	1.587.6400.70	1.587.6400.71	29 x 5,5	1.587.6401.70	1.587.6401.71
1 1/2" NPT	20	48	53	30,5 x 12	1.587.6402.70	1.587.6402.71	31 x 7,5	1.587.6403.70	1.587.6403.71

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com



RoHS

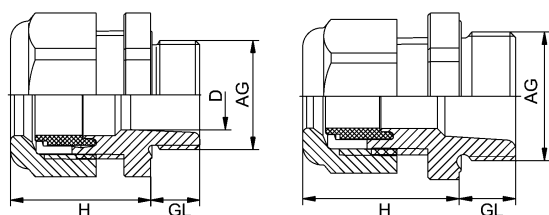

HSK-KE/KR PG



Material: PA (Nylon) V0 according to UL 94
Seal: Buna-N
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range
 only with optional O-Ring
Operating Temperature: -40 °C – 100 °C (-40 °F – 212 °F)
Colors: grey RAL 7035
 black RAL 9005

Also available with flex protection


AG	\varnothing mm	D mm	GL mm	H mm	\varnothing mm	Type	Number grey	Number black
PG 7	4 - 8	7	8	22	19	KE	1.590.0700.14	1.590.0701.14
PG 7	2 - 6	7	8	22	19	KE	1.590.0700.15	1.590.0701.15
PG 9	5 - 10	9	8	25	22	KE	1.590.0900.14	1.590.0901.14
PG 9	3 - 7	9	8	25	22	KE	1.590.0900.15	1.590.0901.15
PG 11	6 - 12	10,5	8	24	24	KE	1.590.1100.14	1.590.1101.14
PG 11	5 - 9	10,5	8	24	24	KE	1.590.1100.15	1.590.1101.15
PG 13,5	10 - 14	12,5	9	28	27	KE	1.590.1300.14	1.590.1301.14
PG 13,5	7 - 12	12,5	9	28	27	KE	1.590.1300.15	1.590.1301.15
PG 16	13 - 18	15	10	31	33	KE	1.590.1600.14	1.590.1601.14
PG 16	9 - 16	15	10	31	33	KE	1.590.1600.15	1.590.1601.15
PG 9	3 - 6,5		8	21	19	KR	1.591.0900.14	1.591.0901.14
PG 9	2 - 5		8	21	19	KR	1.591.0900.15	1.591.0901.15
PG 11	4 - 8		8	22	22	KR	1.591.1100.14	1.591.1101.14
PG 11	2 - 6		8	22	22	KR	1.591.1100.15	1.591.1101.15
PG 13,5	5 - 10		9	25	24	KR	1.591.1300.14	1.591.1301.14
PG 13,5	3 - 7		9	25	24	KR	1.591.1300.15	1.591.1301.15
PG 16	6 - 12		10	27	27	KR	1.591.1600.14	1.591.1601.14
PG 16	5 - 9		10	27	27	KR	1.591.1600.15	1.591.1601.15
PG 21	10 - 14		11	28	33	KR	1.591.2100.14	1.591.2101.14
PG 21	7 - 12		11	28	33	KR	1.591.2100.15	1.591.2101.15

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com





Metric Versions only!



HSK-K PVDF Metric / NPT

Material: PVDF
Seal: FPM
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range only with optional O-Ring

Operating Temperature: -35 °C – 150 °C (-31 °F – 302 °F)

Colors: natural

Other colors available upon request




AG	\varnothing_k mm	GL mm	H mm	\varnothing_{ext} mm	Number
M 12 x 1,5	3 - 6,5	8	21	15	1.299.1200.50
M 12 x 1,5	2 - 5	8	21	15	1.299.1200.51
M 16 x 1,5	4 - 8	8	22	19	1.299.1600.50
M 16 x 1,5	2 - 6	8	22	19	1.299.1600.51
M 20 x 1,5	6 - 12	9	27	24	1.299.2000.50
M 20 x 1,5	5 - 9	9	27	24	1.299.2000.51
M 25 x 1,5	13 - 18	11	31	33	1.299.2500.50
M 25 x 1,5	9 - 16	11	31	33	1.299.2500.51
M 32 x 1,5	18 - 25	11	39	42	1.299.3200.50
M 32 x 1,5	13 - 20	11	39	42	1.299.3200.51
3/8" NPT	4 - 8	15	22	22/19	1.299.3800.70
3/8" NPT	2 - 6	15	22	22/19	1.299.3800.71
1/2" NPT	6 - 12	13	27	24	1.299.1200.70
1/2" NPT	5 - 9	13	27	24	1.299.1200.71
1/2" NPT/16	10 - 14	13	28	27	1.299.1216.70
1/2" NPT/16	7 - 12	13	28	27	1.299.1216.71
3/4" NPT	13 - 18	14	31	33	1.299.3400.70
3/4" NPT	9 - 16	14	31	33	1.299.3400.71

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com



RoHS



HSK-K PVDF PG



Material: PVDF
Seal: FPM
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range
 only with optional O-Ring

Operating Temperature: -35 °C – 150 °C (-31 °F – 302 °F)


Colors: natural

Other colors available upon request

AG	$\varnothing k$ mm	GL mm	H mm	\varnothing mm	Number
PG 7	3 - 6,5	8	21	15	1.299.0700.14
PG 7	2 - 5	8	21	15	1.299.0700.15
PG 9	4 - 8	8	22	19	1.299.0900.14
PG 9	2 - 6	8	22	19	1.299.0900.15
PG 11	5 - 10	8	25	22	1.299.1100.14
PG 11	3 - 7	8	25	22	1.299.1100.15
PG 13,5	6 - 12	9	27	24	1.299.1300.14
PG 13,5	5 - 9	9	27	24	1.299.1300.15
PG 16	10 - 14	10	28	27	1.299.1600.14
PG 16	7 - 12	10	28	27	1.299.1600.15
PG 21	13 - 18	11	31	33	1.299.2100.14
PG 21	9 - 16	11	31	33	1.299.2100.15
PG 29	18 - 25	11	39	42	1.299.2900.14
PG 29	13 - 20	11	39	42	1.299.2900.15
PG 36	22 - 32	13	48	53	1.299.3600.14
PG 36	20 - 26	13	48	53	1.299.3600.15
PG 42	32 - 38	13	49	60	1.299.4200.14
PG 42	25 - 31	13	49	60	1.299.4200.15
PG 48	37 - 44	14	49	65	1.299.4800.14
PG 48	29 - 35	14	49	65	1.299.4800.15

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com





METRICA-P Metric




Material: PA (Nylon) V0 according to UL 94
Seal: Buna-N
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range
 only with optional O-Ring
Operating Temperature: -40 °C – 100 °C (-40 °F – 212 °F)
Colors: grey RAL 7035
 black RAL 9005
 blue RAL 5012 for the intrinsic safety "i"

AG	$\frac{1}{2}$ mm	GL mm	H mm	$\frac{1}{2}$ mm	Number grey	Number black	Number blue
M 12 x 1,5	4 - 7	8	22	15	1.218.1200.50	1.218.1201.50	1.218.1202.50
M 12 x 1,5	2 - 5	8	22	15	1.218.1200.51	1.218.1201.51	1.218.1202.51
M 16 x 1,5	6 - 10	8	26	19	1.218.1600.50	1.218.1601.50	1.218.1602.50
M 16 x 1,5	3 - 7	8	26	19	1.218.1600.51	1.218.1601.51	1.218.1602.51
M 20 x 1,5	8 - 13	9	29	24	1.218.2000.50	1.218.2001.50	1.218.2002.50
M 20 x 1,5	7 - 10	9	29	24	1.218.2000.51	1.218.2001.51	1.218.2002.51
M 25 x 1,5	11 - 17	10	33	30	1.218.2500.50	1.218.2501.50	1.218.2502.50
M 25 x 1,5	8 - 13	10	33	30	1.218.2500.51	1.218.2501.51	1.218.2502.51
M 32 x 1,5	11 - 21	10	41	36	1.218.3200.50	1.218.3201.50	1.218.3202.50
M 32 x 1,5	10 - 15	10	41	36	1.218.3200.51	1.218.3201.51	1.218.3202.51
M 40 x 1,5	19 - 28	12	46	46	1.218.4000.50	1.218.4001.50	1.218.4002.50
M 40 x 1,5	15 - 23	12	46	46	1.218.4000.51	1.218.4001.51	1.218.4002.51
M 50 x 1,5	27 - 35	12	52	55	1.218.5000.50	1.218.5001.50	1.218.5002.50
M 50 x 1,5	22 - 29	12	52	55	1.218.5000.51	1.218.5001.51	1.218.5002.51
M 63 x 1,5	34 - 48	12	57	68	1.218.6300.50	1.218.6301.50	1.218.6302.50
M 63 x 1,5	28 - 39	12	57	68	1.218.6300.51	1.218.6301.51	1.218.6302.51

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com





METRICA-P Metric-elongated



Material: PA (Nylon) V0 according to UL 94
Seal: Buna-N
Protection: IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG)
 within the specified clamping range
 only with optional O-Ring
Operating Temperature: -40 °C – 100 °C (-40 °F – 212 °F)
Colors: grey RAL 7035
 black RAL 9005
 blue RAL 5012 for the intrinsic safety "i"

AG	$\frac{H}{k}$ mm	GL mm	H mm	$\frac{H}{k}$ mm	Number grey	Number black	Number blue
M 12 x 1,5	4 - 7	15	22	15	1.218.1200.30	1.218.1201.30	1.218.1202.30
M 12 x 1,5	2 - 5	15	22	15	1.218.1200.31	1.218.1201.31	1.218.1202.31
M 16 x 1,5	6 - 10	15	26	19	1.218.1600.30	1.218.1601.30	1.218.1602.30
M 16 x 1,5	3 - 7	15	26	19	1.218.1600.31	1.218.1601.31	1.218.1602.31
M 20 x 1,5	8 - 13	15	29	24	1.218.2000.30	1.218.2001.30	1.218.2002.30
M 20 x 1,5	7 - 10	15	29	24	1.218.2000.31	1.218.2001.31	1.218.2002.31
M 25 x 1,5	11 - 17	15	33	30	1.218.2500.30	1.218.2501.30	1.218.2502.30
M 25 x 1,5	8 - 13	15	33	30	1.218.2500.31	1.218.2501.31	1.218.2502.31
M 32 x 1,5	11 - 21	15	41	36	1.218.3200.30	1.218.3201.30	1.218.3202.30
M 32 x 1,5	10 - 15	15	41	36	1.218.3200.31	1.218.3201.31	1.218.3202.31
M 40 x 1,5	19 - 28	18	46	46	1.218.4000.30	1.218.4001.30	1.218.4002.30
M 40 x 1,5	15 - 23	18	46	46	1.218.4000.31	1.218.4001.31	1.218.4002.31
M 50 x 1,5	27 - 35	18	52	55	1.218.5000.30	1.218.5001.30	1.218.5002.30
M 50 x 1,5	22 - 29	18	52	55	1.218.5000.31	1.218.5001.31	1.218.5002.31
M 63 x 1,5	34 - 48	18	57	68	1.218.6300.30	1.218.6301.30	1.218.6302.30
M 63 x 1,5	28 - 39	18	57	68	1.218.6300.31	1.218.6301.31	1.218.6302.31

To learn more about B-I-A please visit us at our
 WEB site: www.BiaGmbH.com

