

MULTI-GANG BOXES AND EXTENSIONS DIE CAST ALUMINUM



Two-Gang Extension Application

- Used to provide additional capacity needed for NEC box fill requirements

Two-Gang Extension Product Features

- Rugged seamless construction
- State-of-the-art powder coat finish
- Installation hardware and gasket provided
- Multi-lingual instructions in each package

Two-Gang Extension Compliances

-  – Standard 514A
-  – C22.2 No. 18
- NEMA 3R Rated



Three-Gang Box Applications


- For use in branch circuit wiring in wet, damp, or dry locations
- Can be used as a weatherproof junction box, or as a housing for receptacles, switches, and GFCI's

Three-Gang Box Product Features


- Seamless die cast aluminum construction
- Reinforced connector outlets
- State-of-the-art powder coat finish
- Eight box mounting options with detachable lugs provided
- Two closure plugs included
- Ground screw installed in boxes
- Multi-lingual instructions in each package

Three-Gang Box Compliances

-  – Standard 514A
-  – C22.2 No. 18
- NEMA 3R Rated



5407-0



5390-0


ORDERING INFORMATION - DIMENSIONS

TWO-GANG EXTENSION - 4-1/2" x 4-9/16" x 1" DEEP						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5407-0	16.3	Gray	—	Shrink	10	

THREE-GANG BOX - 2-5/8" DEEP, WITH LUGS - SEVEN THREADED OUTLETS - 4-1/2" x 6-3/8"						
CATALOG NUMBER	CUBIC IN.	DESCRIPTION		PKG. TYPE	STD. PKG.	UPC BAR CODE
		COLOR	OUTLETS			
5390-0	56.0	Gray	7-3/4"	Boxed	1	

Includes four closure plugs

TWO-GANG EXTENSION

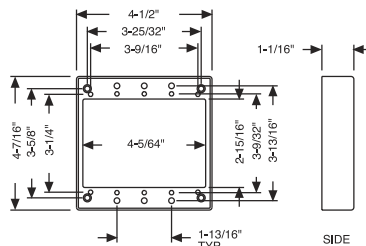

THREE-GANG BOX

