


USA / Canada – 3-Conductor Electronic Jumper Cords




Molded PVC
Shrouded Plug
IEC 60320/C14 UC-009

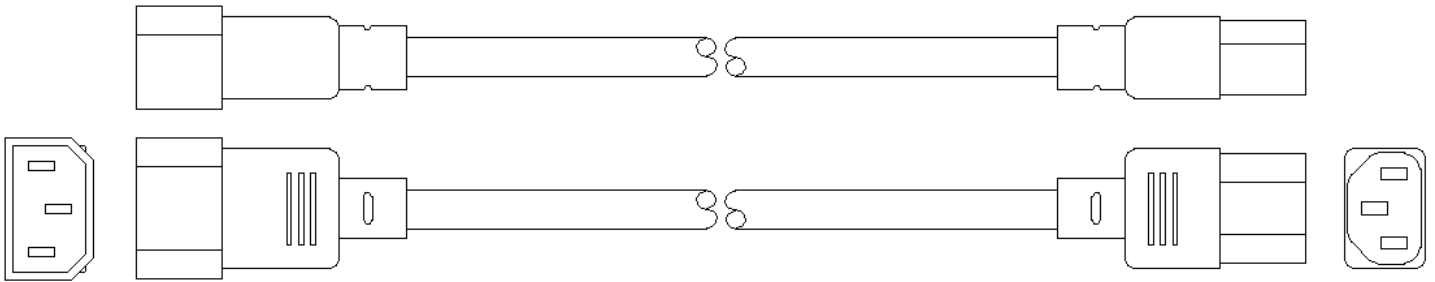

Molded PVC
Receptacle
IEC 60320/C13 UC-005

Catalog Number	Color	Description	Length	Nominal ϕ	Color Code
5835-01M-BB	Black	SVT 18/3 (41x34), Foil Shielded, PVC Jacketed, 60°C, 10A-125V	1.0 m	6.7 mm	CEE


Braided Shield is available upon request as a custom item
Standard bulk packaged

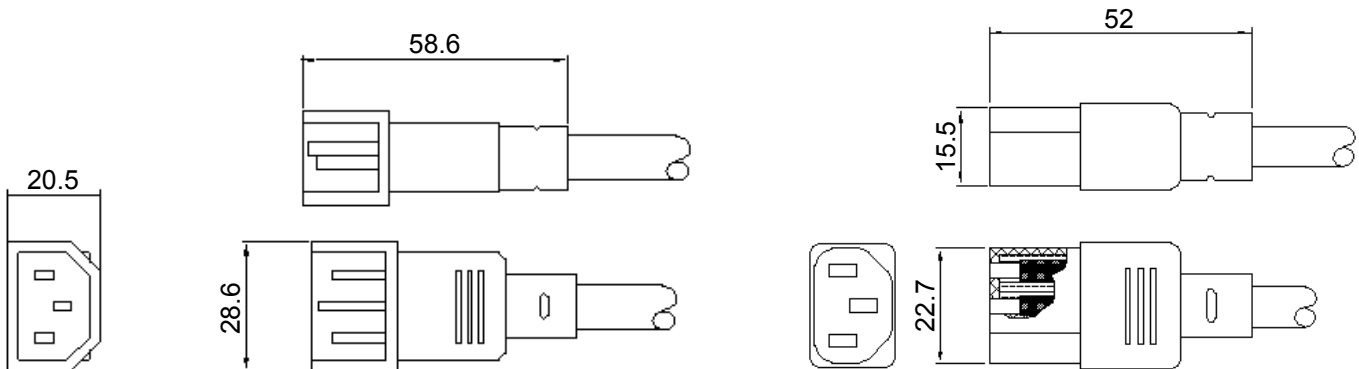

Part Number: **UC-009**
 Configuration: IEC 60320/C14
 Description: Shrouded Grounding Plug
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SVT, SVT(S) 18/3, 16/3;
 SJT, SJT(S) 18/3, 14/3;
 STO, STOW-A 18/3
 Features: Molded PVC over PC insert, shrouded male grounding plug. Nickel-plated brass solid blades.

Part Number: **UC-005**
 Configuration: IEC 60320/C13
 Description: Molded Grounding Receptacle
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SPT-2 18/3, 16/3;
 SVT, SVT(S), STOW, STOW-A 18/3;
 SJT, SJTW, SJT(S) 18/3, 16/3, 14/3
 Features: Molded PVC over PC insert, straight female grounding receptacle. Spring contacts.

USA / Canada – 3-Conductor Electronic Jumper Cords

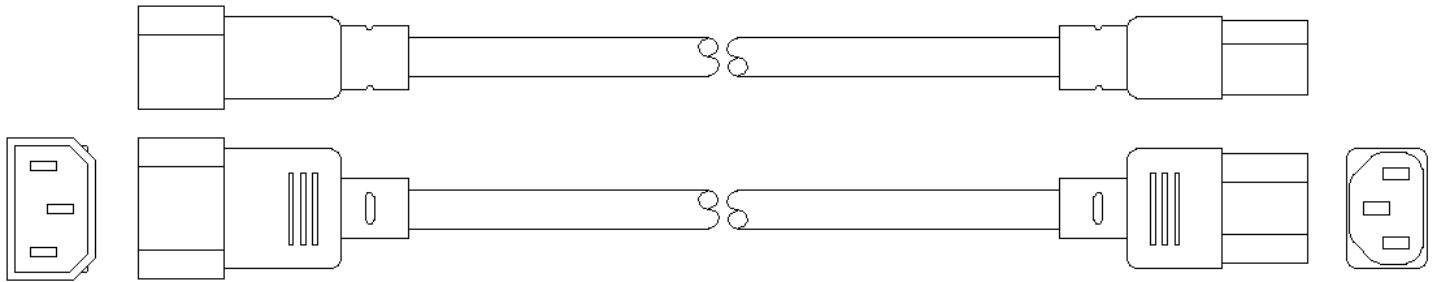


Molded PVC
Shrouded Plug
IEC 60320/C14 UC-009



Molded PVC
Receptacle
IEC 60320/C13 UC-005

Catalog Number	Color	Description	Length	Nominal \varnothing	Color Code
6835-01M-BB	Black	SJT 18/3 (41x34), Foil Shielded, PVC Jacketed, 60°C, 10A-125V	1.0 m	8.7 mm	CEE
6635-01M-BB	Black	SJT 16/3 (65x34), Foil Shielded, PVC Jacketed, 60°C, 13A-125V	1.0 m	9.2 mm	CEE


Braided Shield is available upon request as a custom item
Standard bulk packaged

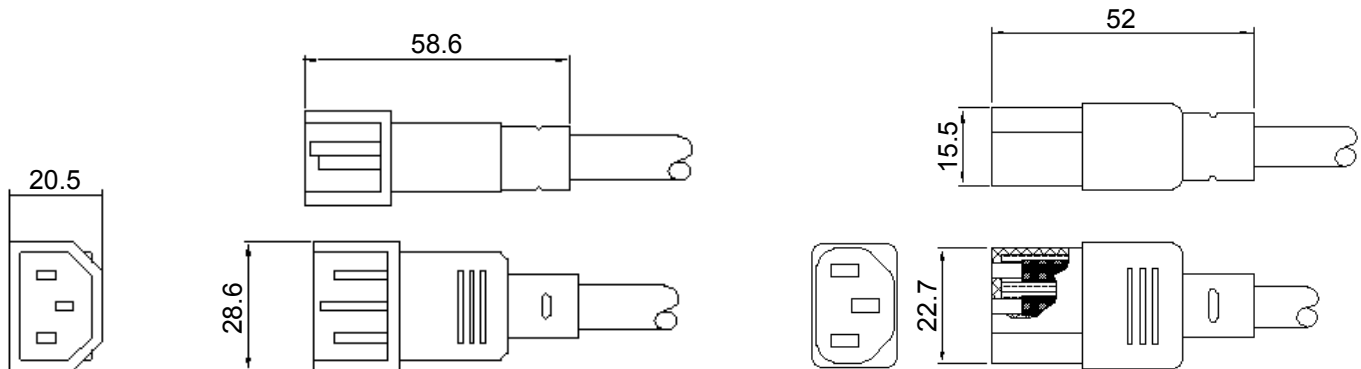

Part Number: **UC-009**
 Configuration: IEC 60320/C14
 Description: Shrouded Grounding Plug
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SVT, SVT(S) 18/3, 16/3;
 SJT, SJT(S) 18/3, 14/3;
 STO, STOW-A 18/3
 Features: Molded PVC over PC insert, shrouded male grounding plug. Nickel-plated brass solid blades.

Part Number: **UC-005**
 Configuration: IEC 60320/C13
 Description: Molded Grounding Receptacle
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SPT-2 18/3, 16/3;
 SVT, SVT(S), STOW, STOW-A 18/3;
 SJT, SJTW, SJT(S) 18/3, 16/3, 14/3
 Features: Molded PVC over PC insert, straight female grounding receptacle. Spring contacts.

USA / Canada – 3-Conductor Electronic Jumper Cords

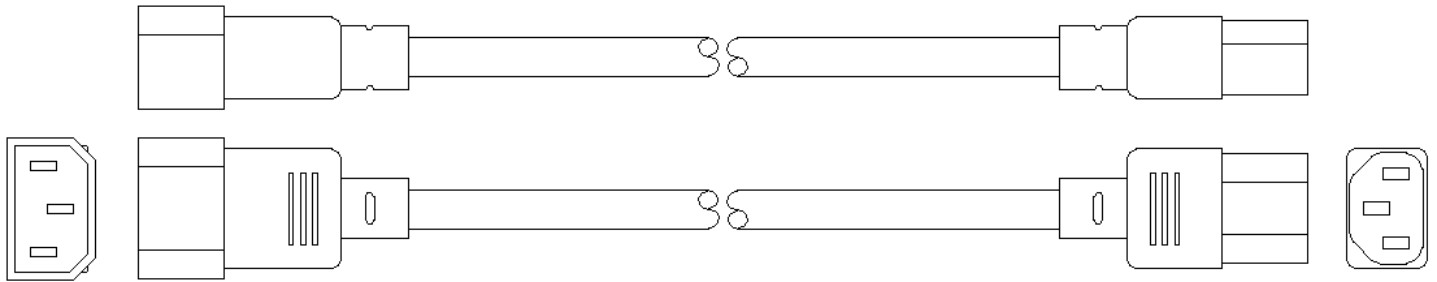


Molded PVC
Shrouded Plug
IEC 60320/C14 UC-009



Molded PVC
Receptacle
IEC 60320/C13 UC-005

Catalog Number	Color	Description	Length	Nominal \varnothing	Color Code
3835-01M-BB	Black	SVT 18/3 (41x34), Unshielded, PVC Jacketed, 60°C, 10A-125V	1.0 m	6.5 mm	CEE
3835-02M-BB	Black	SVT 18/3 (41x34), Unshielded, PVC Jacketed, 60°C, 10A-125V	2.0 m	6.5 mm	CEE


Standard bulk packaged

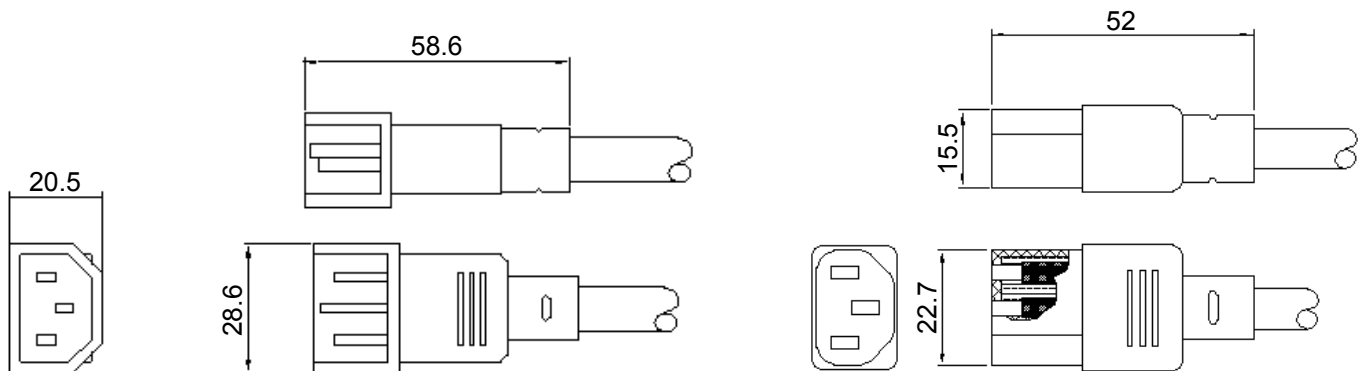

Part Number: **UC-009**
 Configuration: IEC 60320/C14
 Description: Shrouded Grounding Plug
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SVT, SVT(S) 18/3, 16/3;
 SJT, SJT(S) 18/3, 14/3;
 STO, STOW-A 18/3
 Features: Molded PVC over PC insert, shrouded male grounding plug. Nickel-plated brass solid blades.

Part Number: **UC-005**
 Configuration: IEC 60320/C13
 Description: Molded Grounding Receptacle
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SPT-2 18/3, 16/3;
 SVT, SVT(S), STOW, STOW-A 18/3;
 SJT, SJTW, SJT(S) 18/3, 16/3, 14/3
 Features: Molded PVC over PC insert, straight female grounding receptacle. Spring contacts.

USA / Canada – 3-Conductor Electronic Jumper Cords

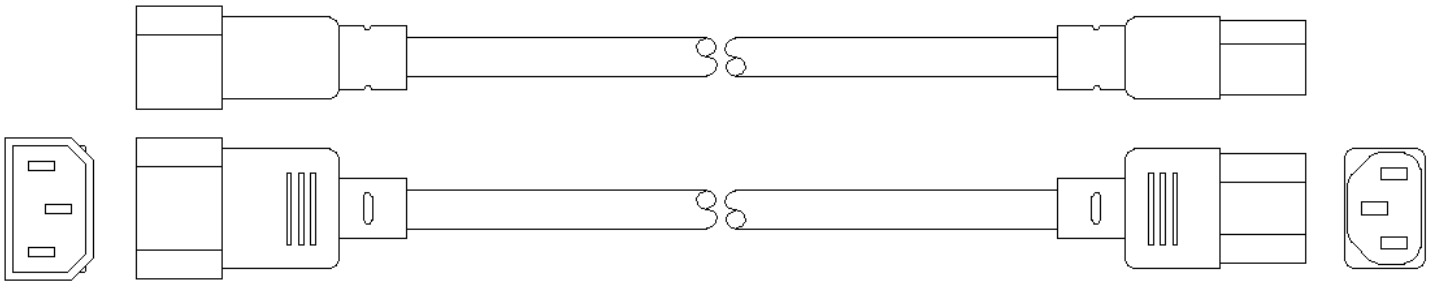


Molded PVC
Shrouded Plug
IEC 60320/C14 UC-009



Molded PVC
Receptacle
IEC 60320/C13 UC-005

Catalog Number	Color	Description	Length	Nominal \varnothing	Color Code
4835-01M-BB	Black	SJT 18/3 (41x34), Unshielded,	1.0 m	7.8 mm	CEE
4835-02M-BB	Black	PVC Jacketed, 60°C/105°C, 10A-125V	2.0 m	7.8 mm	CEE
4635-02M-BB	Black	SJT 16/3 (26x30), Unshielded,	2.0 m	8.5 mm	CEE
		PVC Jacketed, 60°C/105°C, 13A-125V			

Standard bulk packaged

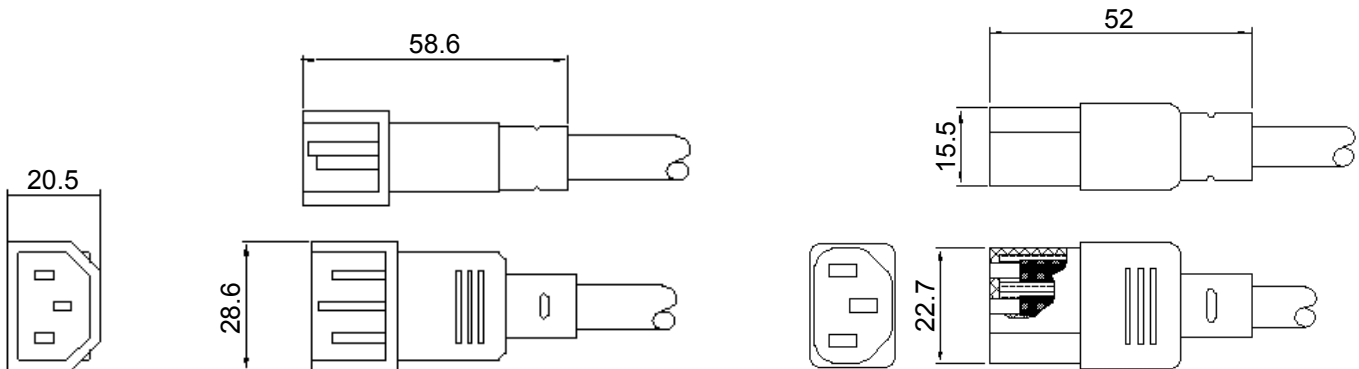

Part Number: **UC-009**
 Configuration: IEC 60320/C14
 Description: Shrouded Grounding Plug
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SVT, SVT(S) 18/3, 16/3;
 SJT, SJT(S) 18/3, 14/3;
 STO, STOW-A 18/3
 Features: Molded PVC over PC insert, shrouded male grounding plug. Nickel-plated brass solid blades.

Part Number: **UC-005**
 Configuration: IEC 60320/C13
 Description: Molded Grounding Receptacle
 Ratings: 15A/125V, 15A/250V
 Approvals: UL, CSA
 Wire Type(s): SPT-2 18/3, 16/3;
 SVT, SVT(S), STOW, STOW-A 18/3;
 SJT, SJTW, SJT(S) 18/3, 16/3, 14/3
 Features: Molded PVC over PC insert, straight female grounding receptacle. Spring contacts.