


## North America - Non-Detachable Power Plug (NEMA 1-15P)

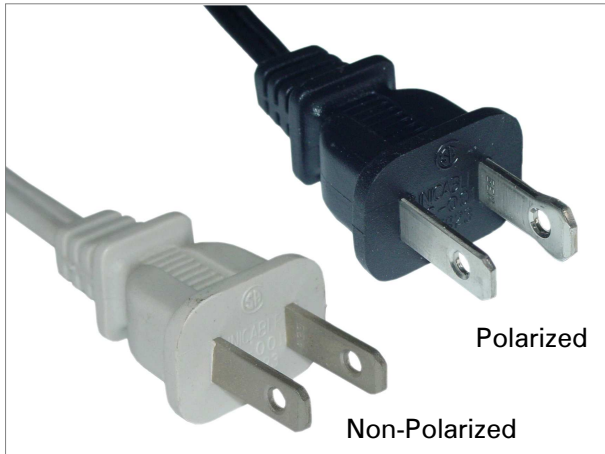

Catalog No. : UC-001 (*Non-Polarized or Polarized*)

**Description** : Molded Plug  
**Standard** : NEMA 1-15P  
**Ratings** : 15A 125V AC  
**Wires/Poles** : 2 Pole 2 Wire Non-Grounding  
**Applications** : For Class II Equipment  
**Approvals** : UL, cUL, CSA  
**Features** : Molded PVC male plug, straight, with flex strain relief. Polarized or non-polarized. Standard nickel-plated brass solid blades (optional folded brass blades available on request).

U.S.A. / Canada

Available with Cords:



*20/2 AWG (4A/125V)*  
XTW


*18/2 AWG (10A/125V)*  
HPN,  
SPT-1, NISPT-1,  
SPT-2, NISPT-2

*16/2 AWG (13A/125V)*  
SPT-2, SPT-2W  
*16/2 AWG (15A/125V)*  
HPN

Popular Cordage	Insulation	Conductor	Amp.*	Stranding	Insulation (mm)	Nominal (mm)	Temp.	
AWG Size/Cond.	Material	Size (mm <sup>2</sup> )	Rating	(No. x AWG)	Thickness	Outer Dims.	Ratings	
SPT-1	18/2	Thermoplastic	0.825	10A	41 x 34	0.76	5.33 x 2.74	60/105°C
SPT-2	18/2	Thermoplastic	0.825	10A	41 x 34	1.14	6.88 x 3.53	60/105°C
HPN	18/2	Neoprene	0.825	10A	41 x 34	1.14	7.11 x 3.51	90/105°C
SPT-2	16/2	Thermoplastic	1.31	13A	65 x 34	1.14	7.34 x 3.86	60/105°C
HPN	16/2	Neoprene	1.31	15A	65 x 34	1.14	7.80 x 3.81	90/105°C

*Special constructions (cordage, length, color, terminations, terminals, etc.) available on request. \*Ampere Rating depending on configuration.*

### Dimensional Data:

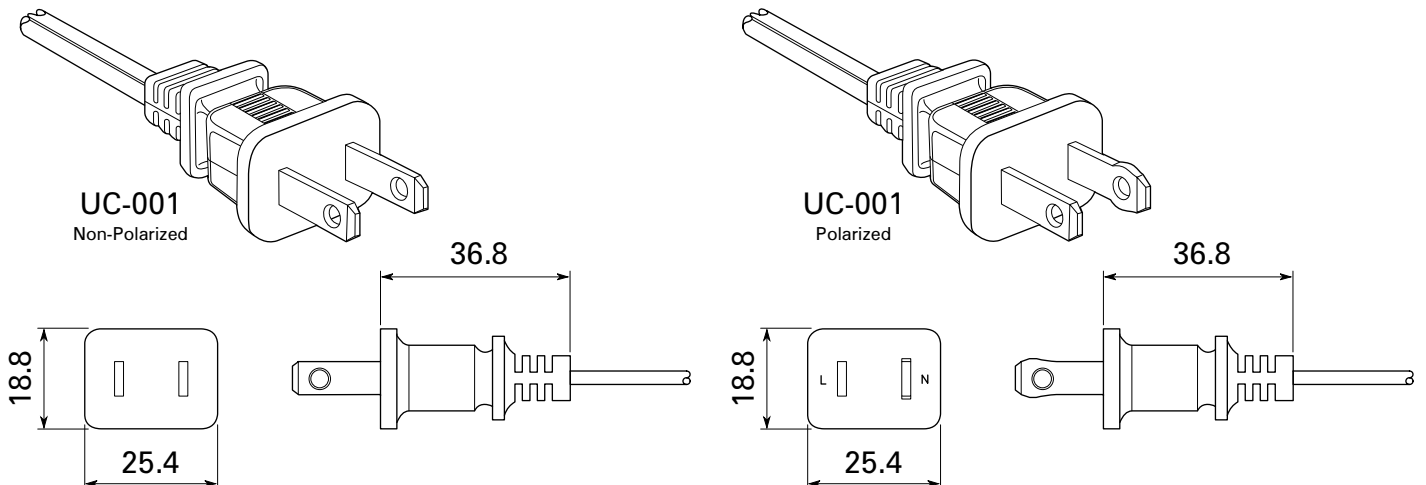

Technical data and dimensions are nominal, subject to change without notice.

Dimensions in mm