

**North America - Non-Detachable Hospital Grade Plug (NEMA 5-15P)**



**Catalog No. : UC-018**


- Description : Molded Hospital Grade Straight Plug
- Configuration : NEMA 5-15P
- Ratings : 15A/125V
- Wires/Poles : 2 Pole 3 Wire Grounding (2P + E)
- Applications : For Class I Equipment
- Approvals : UL, cUL, CSA
- Wire Type(s) : 18/3, 16/3, 14/3: SVT (18/3), SJ, SJO, S, SO, SJOW, SOOW, ST (18/3, 16/3), SJT, SJT Low Leakage; 12/3: SJT, SJTW, SJTOW Low Leakage
- Features : Hospital Grade with Green Dot

Popular Cordage AWG Size/Cond.	Jacket Material	Conductor Size (mm <sup>2</sup> )	Amp.* Rating	Insulation Material	Stranding (No. x AWG)	Insulation (mm) Thickness	Jacket (mm) Thickness	Jacket (mm) Outside Dia.	Temperature Ratings (°C)
SJT 18/3	PVC	0.825	10A	PVC	41 x 34	0.76	0.76	7.8	60, 105
SJT 16/3	PVC	1.320	13A	PVC	26 x 30	0.76	0.76	8.5	60, 105
SJT 14/3	PVC	2.080	18A	PVC	41 x 30	0.76	0.76	9.5	60, 105
SJT 12/3	PVC	3.290	25A	PVC	65 x 30	0.76	1.14	10.9	60, 105


*Light duty cordage: SVT; Medium duty cordage: SJT, SJTW (weather resistant), SJTOW (oil & weather resistant), SJTO (oil resistant), SJO (rubber, oil res.); Heavy duty cordage: ST, SJ (rubber) – Shielded cordage available. For further information contact our sales office.*

*Special constructions (cordage, length, color, terminations, terminals, etc.) available on request. \*Ampere Rating depending on configuration.*

**Dimensional Data:**

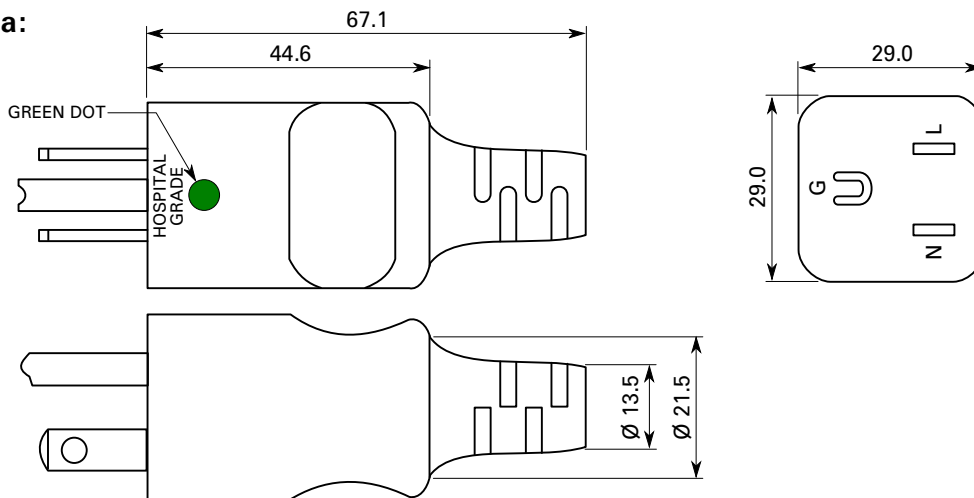

*Technical data and informations are nominal only and subject to change without notice. Dimensions in mm.*

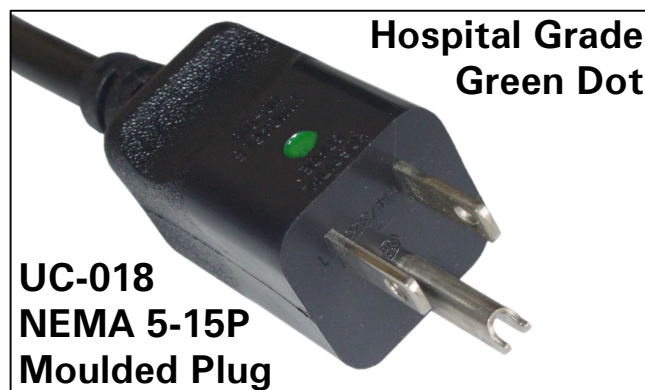

**UC-018  
NEMA 5-15P  
Moulded Plug**