

P R E L I M I N A R Y

Portable AIR CONDITIONERS

Bucketless Design

Self evaporative condensate system means no bucket to empty. If tank should become full, the unit will automatically shut off and unit can be drained through the water outlet drain.

Features

- 40% FASTER COOLING with dual hose exhaust
- LCD remote control
- Self evaporative condensate system
- 24 hour timer
- 3 fan speeds
- Plugs into standard 115 volt outlet
- Cool/fan only/dehumidify
- Exhaust hoses and window kit included



ZoneAire



COOL or DEHUMIDIFY



Hoses extend from 24" to 60"



NOTE:
Venting of the unit to the outside is required for operating efficiency.

Ideal for these applications

- Workshops and garages
- Home offices
- Dorm rooms
- Bedrooms, attics and basements
- Sunrooms/ enclosed patios
- Supplemental or emergency cooling anywhere

R-410A



All models use environmentally friendly R-410A refrigerant.

REMOTE CONTROL	24-HOUR TIMER	BUCKETLESS DESIGN	EZ-ROLL CASTERS
✓	✓	✓	✓

Specifications


Model		P09B	P12B
PERFORMANCE			
Cooling Capacity	BTU/h	8900	11500
Energy Efficiency Rating	EER	9.6	8.9
Air Movement	CFM	212	235
Moisture Removal	Pts/hr.	5.0	6.0
SPECIFICATIONS			
Rated Current	Amps	9.8	12.0
Running Current	Amps	8.0	10.5
Refrigerant Type		R410A	
Power Supply	Volts	115	
Dimensions- Inches	W	19 1/4	
	H	33 1/2	
	D	15 1/2	
Net Weight	Lbs.	80	86

Model Number	Circuit Rating Breaker or T-D Fuse	Plug Face (NEMA#)	Wall Outlet Appearance	Power cord length
P09B, P12B	125V - 15A	5 - 15P		6 ft.

Portable Accessories

DUAL INTAKE/ EXHAUST HOSES (Included)
Flexible, heavy duty intake/ exhaust hoses extend from 24" to 60". The hoses can be vented through a window or through a wall opening to the outside.

WINDOW SLIDER KIT (Included)

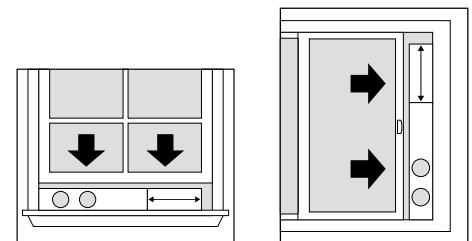

Fits HORIZONTAL or VERTICAL WINDOWS
WINDOW OPENING:
Minimum: 26"* Maximum: 46"

* Window slider kit can be trimmed to fit a smaller opening.

