





Model YC-13

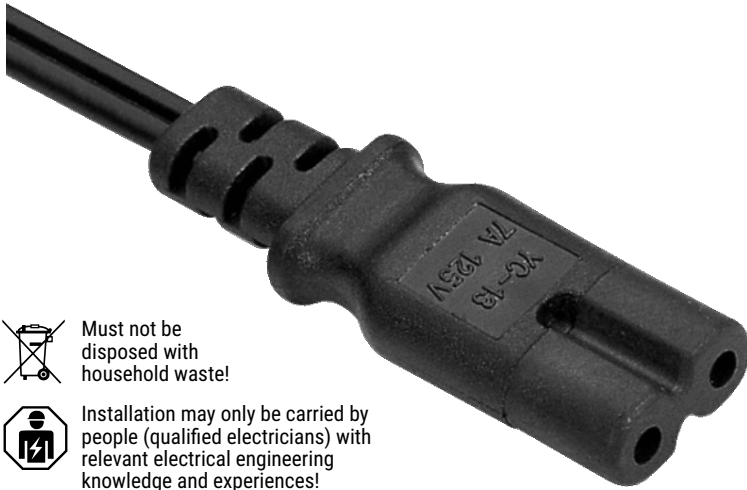

 Must not be disposed with household waste!

 Installation may only be carried by people (qualified electricians) with relevant electrical engineering knowledge and experiences!

- **Ratings (max):** 7 Amp, 250 Volt AC
- **For use with:** Class II Equipment
- **Standard:** IEC 60320 C7
- **Target Countries:** International
- **Standard Colors:** Black, White, Gray
- **Approvals and Compliance:**

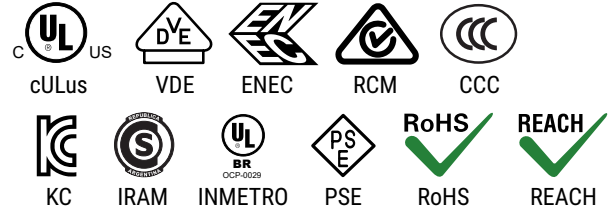

Wire Types

Approvals	Wire Size	Ratings (max), Target Countries	Wire and Cable Types
 cULus	AWG 18/2 0.823 mm ²	7A 125V~ or 2.5A 250V~ North America (USA, Canada)	SPT-1, SPT-2, NISPT-2, SVT, SJT (All TPE material), SPT-1, SPT-1W, SPT-2, SPT-2W, NISPT-1, NISPT-2, SVT, SJT
 VDE	0.75X2C 0.75 mm ²	2.5A 250V~ Europe	H03VV-F, H03VVH2-F, H03V2V2-F, H03V2V2H2, FH05VV-F, H05VVH2-F, H05V2V2-F, H05V2V2H2-F
 ENEC	0.75X2C 0.75 mm ²	2.5A 250V~ Europe	H03VV-F, H03VVH2-F, H05VV-F, H05VVH2-F
 RCM	0.75X2C 0.75 mm ²	2.5A 250V~ Australia, New Zealand	H03VV-F, H03VVH2-F, H05VV-F, H05VVH2-F
 CCC	0.75X2C 0.75 mm ²	2.5A 250V~ China	60227 IEC53, 60227 IEC52
 KC	0.75X2C 0.75 mm ²	2.5A 250V~ Korea	H03VVH2-F, H05VVH2-F
 IRAM	0.75X2C 0.75 mm ²	2.5A 250V~ Argentina	H03VVH2-F, H05VVH2-F
 INMETRO	0.75X2C 0.75 mm ²	2.5A 250V~ Brazil	H03VVH2-F, H05VVH2-F
 PSE	0.75X2C 0.75 mm ²	7A 125V~ or 2.5A 250V~ Japan	VFF, HVFF, VCTFK, HVCTFK

Nominal Dimensions: mm

