





Model YC-14





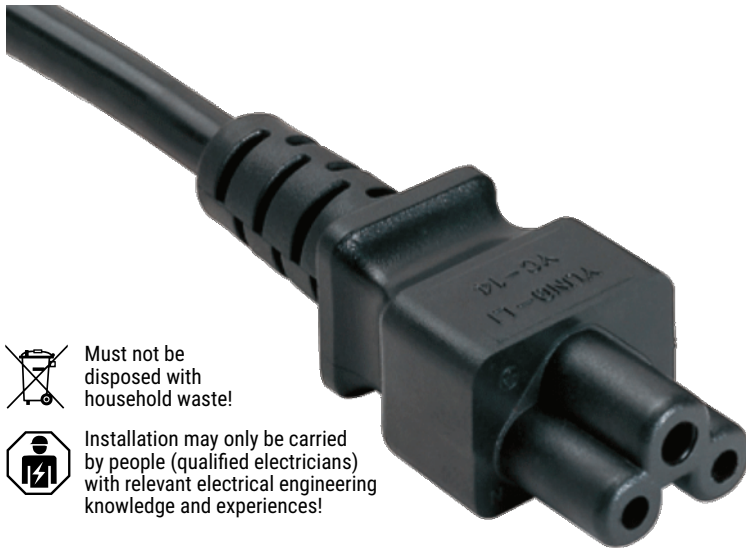



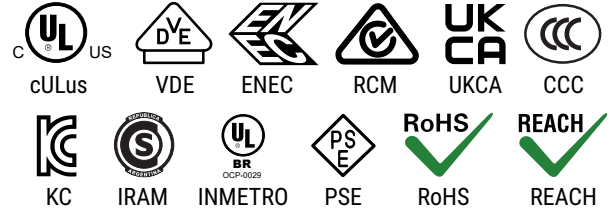



 Must not be disposed with household waste!

 Installation may only be carried by people (qualified electricians) with relevant electrical engineering knowledge and experiences!


- **Ratings (max):** 7 Amp, 250 Volt AC
- **For use with:** Class I Equipment
- **Standard:** IEC 60320 C5
- **Target Countries:** International
- **Standard Colors:** Black, White, Gray
- **Approvals and Compliance:**



Wire Types

Approval Mark, Wire Size, Maximum Ratings (Ampere, Volt AC), Target Countries, Wire and Cable Type(s)					
 cULus AWG 18/3 0.823 mm ² SPT-2, SVT, SVT shielded, SVTO, SJT, SJT shielded, SJTW, SJTW shielded, SJTO, SJTOW (All TPE material), SV, SVO, SJ, SJO, SJOW, SJOOW	7A 125V~ or 2.5A 250V~ North America (USA, Canada)	  VDE ENEC H05VV-F X 3C 0.75, 1.0, or 1.5 mm ²	2.5A 250V~ Europe		
		 RCM H05VV-F X 3C 0.75 or 1.0 mm ²	2.5A 250V~ Australia, New Zealand		
 UKCA H05VV-F X 3C 0.75, 1.0, or 1.5 mm ²	2.5A 250V~ United Kingdom	 CCC 60227 IEC53 X 3C 0.75 or 1.0 mm ²	2.5A 250V~ China		
 KC H05VV-F X 3C 0.75, 1.0, or 1.5 mm ²	2.5A 250V~ Korea	 IRAM H05VV-F X 3C 0.75 or 1.0 mm ²	2.5A 250V~ Argentina		
 INMETRO H05VV-F X 3C 0.75 or 1.0 mm ²	2.5A 250V~ Brazil	 PSE VCTF or HVCTF X 3C 0.75 mm ²	7A 125V~ Japan		

Nominal Dimensions: mm

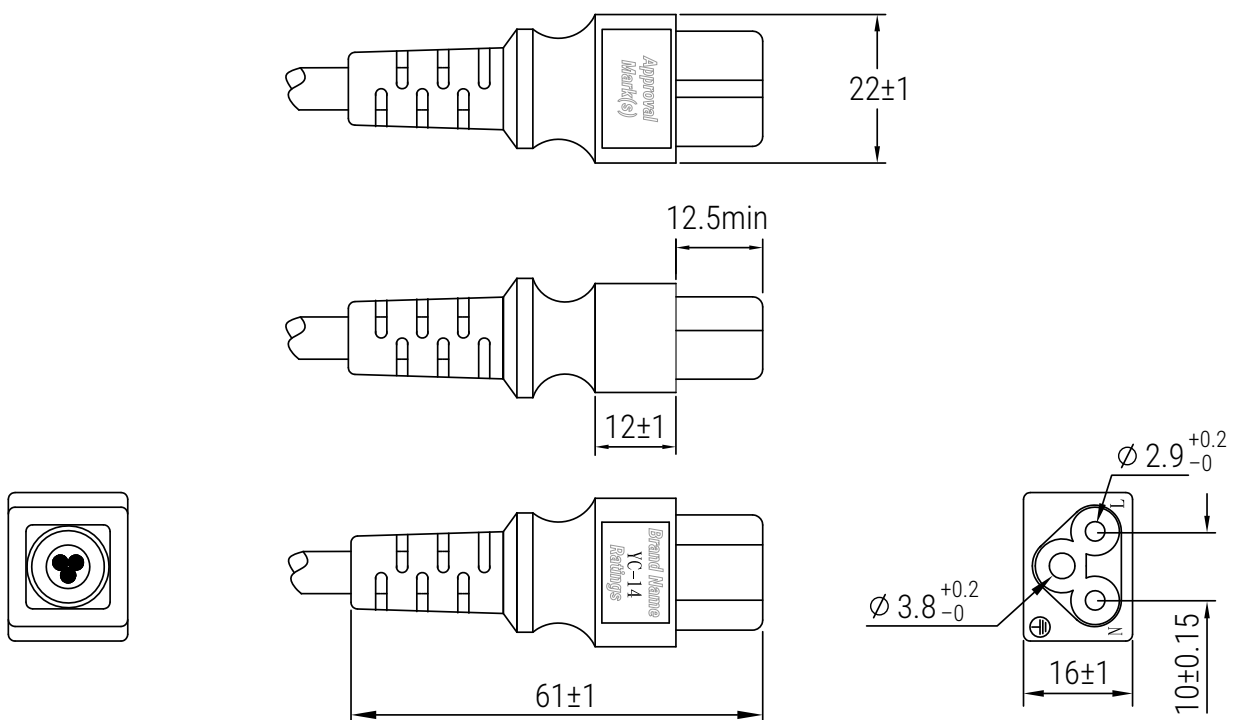

If you cannot find your desired power cord here, please contact our sales office to get an offer for a made-to-order product from a minimum quantity of 500 pieces. The production lead time will be approx. 14 weeks after receipt of the purchase order. Specifications are subject to change without notice.