

LFBM SERIES

Indoor Fluorescent

DESCRIPTION: The *LFBM Series* is an interior below-deck fluorescent fixture suited for berth/mirror lighting.



Half cut-out lens shown

14.5" 36.20cm 3.62" 9.20cm 4.5" 11.43cm

Weight: 2.72 lbs 1.24 kgs

SPECIFICATIONS

Housing: Corrosion-resistant, Marine grade low copper content aluminum alloy.

Cover: White ABS material.

Diffuser: Clear ribbed acrylic half cut-out lens

standard.

Hardware: All external hardware is stainless steel.

Ballast: Normal power factor 120V 60Hz is

standard. Class P.

Convenience Outlet: 120V 3-wire convenience

outlet with ground is standard.

Switch: Single pole rocker momentary contact

type

Reflector: Marine grade low copper content aluminum alloy with high reflectance white powder

coat finish.

OPTIONS

- Other voltages and 50Hz are available
- Less convenience outlet
- Mirror lens cover
- Prismatic lens
- Ribbed lens

COMPLIANCES

UL 1598A Listed - Marine Type Electric Fixture Inside Type


US Coast Guard Accepted

cUL Listed for use in Canada







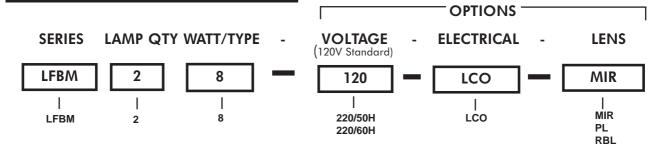

WATT/TYPE

8 = F8 T-5 (Mini Bi-pin) **VOLTAGE OPTIONS**

(120V Standard) 220/50H = 220 Volt; 50Hz 220/60H = 220 Volt; 60Hz **ELECTRICAL OPTIONS**

LCO = Less Convenience Outlet

LENS OPTION

MIR = Mirror Lens (prismatic, full cutout)

PL = Prismatic Lens (adder for half cutout style only)

RBL = Ribbed Lens (adder for mirror/full cutout style only)

LAMPS NOT INCLUDED

WIRING DIAGRAM

