


Brazil - Rewirable Mains Line Angled Plugs, 20A, NBR 14136

Rewirable Mains Line Angled Plugs, Brazilian Standard, 20 Amp, 250 Volt AC, 2 Pole 3 Wire Grounding

Wiederanschließbare Winkelstecker, brasilianischer Standard, 20 Amp, 250 Volt AC, 2P + E

SPECIFICATIONS

- Ratings: 20 Amp, 250 Volts AC
- 2 Pole 3 Wire Grounding
- According to NBR 14136/2002
- Screw-Type Terminals, Brass
- Thermoplastic Housing
- Suitable for Cordage Diameter (6.3 to 11)mm

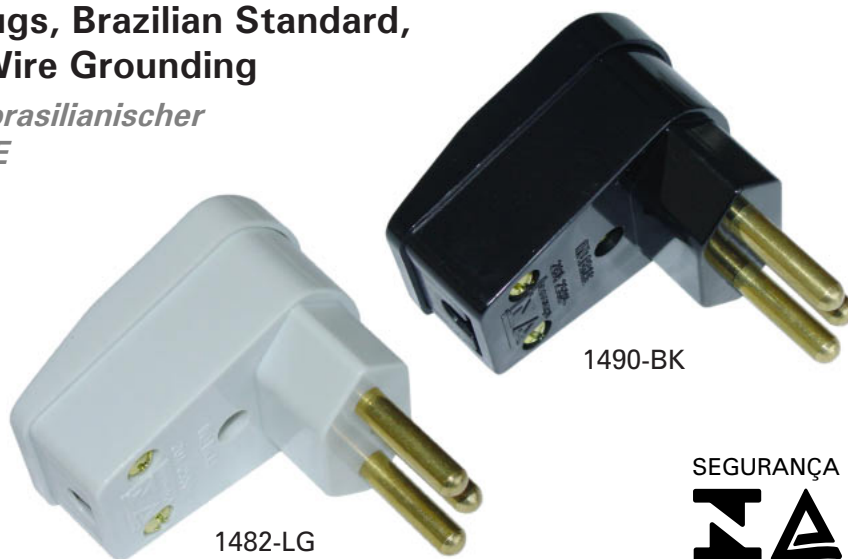

Catalog No.	Color	Description	VPE / Packed	Weight / each	EDP No.
1482-LG	Light Grey	Angle Plug, 20A, 250V AC, Brazil NBR 14136	700/25 ea	31 g net.	125832
1490-BK	Black	Angle Plug, 20A, 250V AC, Brazil NBR 14136	700/25 ea	31 g net.	125833

TECHNICAL DATA AND DIMENSIONS

Inside View Cover

Inside View Terminals

Cordage \varnothing 6.3 to 11.0 (Break-Out)

Dimensions (mm):

- Top view: 19 ± 0.2, 17.0, 3 ± 0.15, 35.5, 26.0, 90°, 40.0, 52.5, 3
- Side view: 57.2, 38.0, 23.5, 19.2

IND. BRAS. 20A 250V~

SEGURANÇA

Warning: The load can not exceed the specifications written in the products.

Technical Data are Subject to Change without Notice. Dimensions in mm.