

International - Non-Detachable Connector, IEC 60320/C13



Catalog No. : YC-12


Country : International
Standard : IEC 60320/C13
Ratings : 7A, 10A, 250V AC
 7A, 10A, 12A, 13A, 15A 125V AC
Wires/Poles : 2 Pole 3 Wire Grounding (2P + E)
Applications : For Class I Equipment

Notes : Available as Angled Version
(Left, Right, Up, and Down)
Please contact our sales office.

Available with Cords:

<p>North America – UL, CSA Ratings: 10A, 13A, 15A 125V AC 10A 250V AC Wire Types: AWG 18 SVT, SVT Shielded SJT, SJT Shielded SJTW, SJTW Shielded SPT-2 AWG 16 SJT, SJT Shielded SJTW, SJTW Shielded AWG 14 SJT, SJT Shielded SJTW, SJTW Shielded</p>	<p>Australia / New Zealand – SAA Ratings: 10A 250V AC Wire Types: H05VV-F, 0.75mm² x 3C H05VV-F, 1.00mm² x 3C</p>	<p>Taiwan – BSMI Ratings: 7A, 12A, 15A 125V AC Wire Types: (H)VCTF, 0.75mm² (H)VCTF, 1.25mm²</p>
<p>Continental Europe – SEMKO, FIMKO, DEMKO, NEMKO, ESTI/SEV, ÖVE, IMO, CEBEC, KEMA, LCIE, VDE Ratings: 10A 250V AC Wire Types: H05VV-F, 0.75mm² x 3C H05VV-F, 1.00mm² x 3C</p>	<p>Japan – PSE, JET Ratings: 7A, 12A, 15A 125V AC Wire Types: (H)VCTF, 0.75mm² (H)VCTF, 1.00mm² (H)VCTF, 1.25mm²</p>	<p>Korea – PSE, JET Ratings: 7A 250V AC Wire Types: (H)VCTF, 0.75mm²</p>
	<p>China – CCC, CQC Ratings: 10A 250V AC Wire Types: RVV, 0.75mm² RVV, 1.0mm² RVV, 1.25mm²</p>	

Dimensional Data:

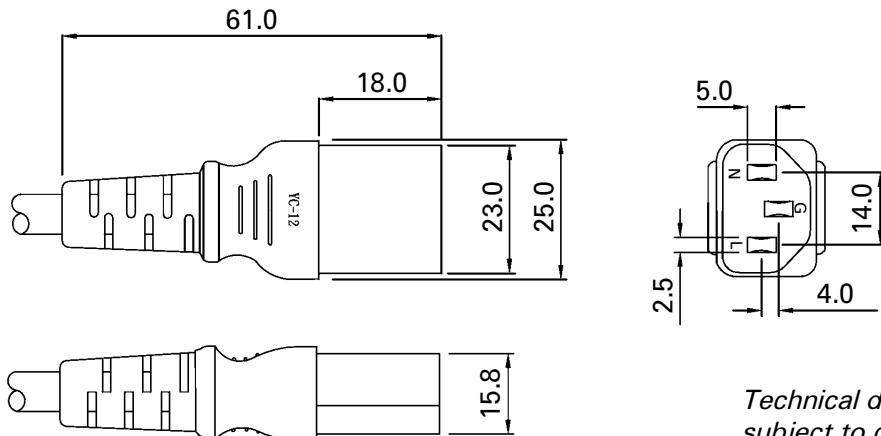

Dimensions in mm

Technical data and dimensions are subject to change without notice.