

## Straight Blade Plugs & Connectors Hospital Grade Plugs & Connectors


2 Pole, 3 Wire Grounding 15 & 20A, 125 & 250V

### IP20


Suitability

#### Features – Extra-Hard Use (EHU)

- Unit arrives completely ready-to-wire, cuts installation time significantly.
- Nylon housing provides impact and chemical resistance.
- Rugged two-piece cord grip provides more uniform cord retention.
- Internal dust shield keeps terminals free of contaminants.
- Tri-drive assembly screws are standard on Hospital Grade plugs and connectors (angle plugs not included).
- All 3-wire terminals located on the same plane, allows for quick wire termination from any angle.
- Heavy-duty brass alloy blades and contacts, resist heat rise, provide excellent conductivity.
- Cord-grip screws recessed to protect installer against screwdriver head slippage.




PS5266-XHG



PS5269-XHG



PS5266-HGAN




PS8115



PS8119

Catalog Number	Rating A. V.	Description	Cord Diameter	NEMA Config. No.	3rd Party Compliance		
					UL498	FSUL WC596	C22.2 No. 42
<b>Hospital Grade – Extra-Hard Use (EHU)</b>							
PS5266-XHG	15 125	Plug, Black & Clear	.230"-.720"	5-15P	•	•	•
PS5266-HGAN	15 125	Angle Plug, Black & Clear	.320"-.655"	5-15P	•	•	•
PS5269-XHG	15 125	Connector, Black & Clear	.230"-.720"	5-15R	•	•	•
PS5366-XHG	20 125	Plug, Black & Clear	.230"-.720"	5-20P	•	•	•
PS5366-HGAN	20 125	Angle Plug, Black & Clear	.320"-.655"	5-20P	•	•	•
PS5369-XHG	20 125	Connector, Black & Clear	.230"-.720"	5-20R	•	•	•
PS5666-XHG	15 250	Plug, Black & Clear	.230"-.720"	6-15P	•	•	•
PS5666-HGAN	15 250	Angle Plug, Black & Clear	.320"-.655"	6-15P	•	•	•
PS5669-XHG	15 250	Connector, Black & Clear	.230"-.720"	6-15R	•	•	•
PS5466-XHG	20 250	Plug, Black & Clear	.230"-.720"	6-20P	•	•	•
PS5466-HGAN	20 250	Angle Plug, Black & Clear	.320"-.655"	6-20P	•	•	•
PS5469-XHG	20 250	Connector, Black & Clear	.230"-.720"	6-20R	•	•	•
<b>Hospital Grade MaxGrip® M³</b>							
PS8115	15 125	Plug, Gray	.230"-.720"	5-15P	•	•	•
PS8119	15 125	Connector, Gray	.230"-.720"	5-15R	•	•	•

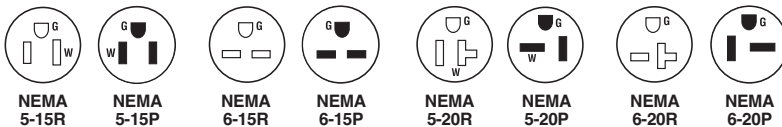

Catalog Number	Description
<b>Accessories</b>	
EHU15AN	15 & 20A EHU Straight Blade, Right Angle Adapter
FC22-GL	EHU-Strain Relief Grip*
FC30-GL	EHU-Strain Relief Grip*
FC40-GL	EHU-Strain Relief Grip*
FC52-GL	EHU-Strain Relief Grip*

\*For further information consult the Flexcor® Section K.

All devices listed on this page conform to NEMA WD-1 and WD-6.