

Israel - Rewirable Angeled Cord Plugs, 5054 Series

Angled Mains Line Plug with Grounding Contact,
Israeli Standard, 2P + E, 16 Amp, 250 Volt AC



Specifications:


- **Ratings:** 16 Amp, 250 Volt AC
2 Pole 3 Wire Grounding (2P + E)
- **Compliant with Standards:**
SI32 (1989) SII (Round Pins)
- **Ingress Protection:** IP20
- **Type of Terminals:** Screw Type
- **Contact Material:** Brass
- **Carrying Parts:** Polycarbonate
- **Cover/Enclosure:** Polycarbonate
- **Colors available:** Black, White



Catalog No.	Color	Description	Weight/ea	VPE/Pack	EDP No.
5054-BK	Black	Rewirable Angeled Cord Plug, 16A, 250V AC, 2P + E	29 g (net)	200/20	126059
5054-WH	White	Rewirable Angeled Cord Plug, 16A, 250V AC, 2P + E	29 g (net)	200/20	126058

Technical Data:

Product series:	5054 xx	Produktreihe:	5054 xx
Product description:	Rewireable Cord Plug, 2 pole 3 wire grounding (2P + E), 16A 250V AC	Produktbeschreibung:	wiederanschließbarer Stecker, 2P + E, 16A 250V AC
Standards:	according SI32 (1989) Israel SII, RoHS compliant 2002/96/EC	Standarts:	nach SI32 (1989) Israel SII, RoHS konform 2002/96/EC
Type of material:	Thermoplastic	Werkstoff:	Kunststoff
Material specification:	Polycarbonate	Werkstoffgüte:	Polycarbonat
Contact material:	Brass	Kontaktmaterial:	Messing
Assembly screws:	Zinc plated steel	Montageschrauben:	Stahl, verzinkt
Ingress protection (IP):	IP20	Schutzart (IP):	IP20
Plug-in direction:	Angeled (90°)	Steckrichtung:	gewinkelt (90°)
Type of connection:	Screw terminals	Anschlussstechnik:	Schraubklemmen
Cordage sizes:	3 x 0.75mm², 3 x 1mm², 3 x 1.5mm²	Leistungsgrößen:	3 x 0.75mm², 3 x 1mm², 3 x 1.5mm²
Cable diameter:	10 to 11 mm max.	Leitungsdurchmesser:	10 bis 11 mm maximal

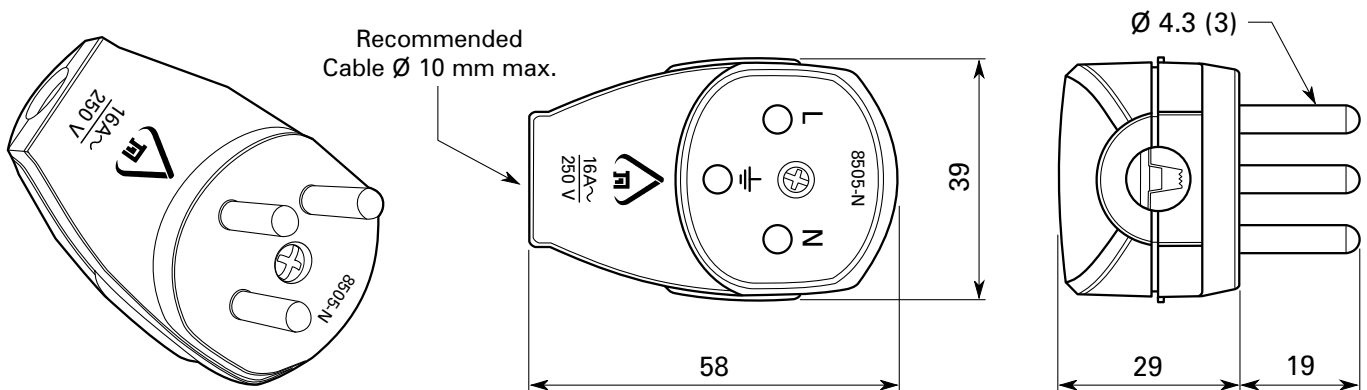

Technical data and dimensions are subject to change without notice. Dimensions in mm.