

CABLED TWISTED PAIRS CONDUCTORS – NWP Series

Heavy Duty

- Twisted Pairs (NWP Series)
- Mil Spec, U.L. AWM

Recognized Style 2343 or 2344 and
CSA Certified AWM II A/B*

Identical to NW-Series Cables
except offered as twisted pairs.

Complete line of multiple pair control cables. Conductors are of tinned copper strand with .015" vinyl primary insulation for use up to 105°C per MIL-W16878/2*. Insulated for 1000 volts working voltage. Conductors are color coded using 10 standard basic colors, plus spiral tracers on white. View Color Table in the specification sheet.


All pairs are planetary cabled and contra-helically laid with a Mylar tape serve over the cable bundle. Shielded cables have a tinned copper braid overall, of 85-90% coverage per MIL-C-7078, and braid angles below 40° for easy pushback.

The outer jacket is black, abrasion-resistant 105°C vinyl meeting MIL-I-631 Type F. This material is self-extinguishing and fungus resistant. Also available with Neoprene to MIL-R-6855 Class 2 Grade 60 specification, non-U.L. applications. Also available with Neoprene jacket as a custom product. Consult factory for details.

** Cables are U.L. STYLE 2343 or 2344, rated 80°C, and CSA CERTIFIED for 105°C as described below. U.L. and/or CSA certification furnished only when requested.

* Insulated wires also meet U.L. Style 1007 or 1569 as appropriate for gauge.

For color code of pairs, View Color Table in the specification sheet.

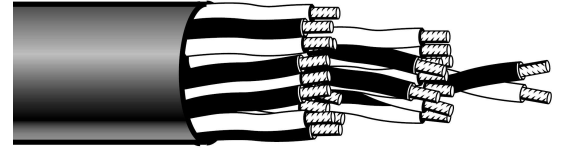

RoHS compliant products available.


TECHNICAL DATA (ALL CABLES)	
Insulation Breakdown Voltage:	Greater than 5000 volts AC RMS, 60cps.
U.L. Voltage Rating:	300 volts RMS AC (appliance use). 600 volts RMS AC (electronic use).
CSA Voltage Rating:	300 volts RMS AC (appliance use).
Military Voltage Rating:	1000 volts RMS
Capacitance:	Nominal capacitance wire to wire for a pair ranges from 27 to 40 pf/ft. Capacitance from both wires tied together measured to all else in common ranges from 35 to 60 mmfd/ft. dependent on gauge and position. Overall shield has negligible effect on W-W capacitance.
Insulation Leakage Res.:	200 megohms/1000 ft. min. at 500 VDC from any conductor to all else in cable.
Sheath Leakage Res.:	10 megohms/1000 ft. min. at 500 VDC from overall shield through sheath to outside world.
Usable Temp. Range:	Suitable for continuous use from +105°C to -40°C.
Cold Bending Capability:	All cables are suitable for flexing to a circle diameter of 6 cable diameters from +105°C to -20°C. Recommended flex diameter should be greater than 20 cable diameters for flexing at -40°C. For continuous flexing application consult the factory.

CABLED TWISTED PAIRS CONDUCTORS

Heavy Duty

- Twisted Pairs (NWP Series)
- Mil Spec, U.L. AWM

Recognized Style 2343 or 2344 and CSA Certified AWM II A/B*

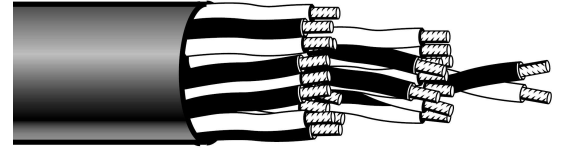

RoHS compliant products available.

MULTI-CONDUCTOR STOCK CABLES

Conductor sizes 22 AWG is 7 stranded. All others are 19 strand.

TO ORDER RoHS COMPLIANT PRODUCTS:

please add the letter "R" into the second position of the Part No.

EXAMPLE: Non-RoHS Part No NK1234 EXAMPLE: RoHS Part No NRK1234

NWP SERIES UNSHIELD - 22, 20 and 18 AWG										
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight	
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM
NWP-722J	7	22	.064	1.6	.062	1.6	.454	11.5	103	154
NWP-1222J	12	22	.064	1.6	.062	1.6	.581	14.7	157	234
NWP-1922J	19	22	.064	1.6	.062	1.6	.672	17.1	221	329
NWP-2722J	27	22	.064	1.6	.062	1.6	.798	20.3	297	442
NWP-3722J	37	22	.064	1.6	.080	2.0	.926	23.5	418	621
NWP-4822J	48	22	.064	1.6	.080	2.0	1.045	26.6	520	773
NWP-6022J	60	22	.064	1.6	.080	2.0	1.143	29.0	625	930
NWP-720J	7	20	.072	1.8	.062	1.6	.495	12.6	135	201
NWP-1220J	12	20	.072	1.8	.062	1.6	.637	16.2	210	313
NWP-1920J	19	20	.072	1.8	.062	1.6	.740	18.8	302	450
NWP-2720J	27	20	.072	1.8	.080	2.0	.918	23.3	445	662
NWP-3720J	37	20	.072	1.8	.080	2.0	1.021	25.9	575	855
NWP-4820J	48	20	.072	1.8	.080	2.0	1.155	29.3	721	1073
NWP-6020J	60	20	.072	1.8	.080	2.0	1.266	32.1	874	1300
NWP-718J	7	18	.082	2.1	.062	1.6	.546	13.9	175	261
NWP-1218J	12	18	.082	2.1	.062	1.6	.708	18.0	277	412
NWP-1918J	19	18	.082	2.1	.080	2.0	.861	21.9	436	649
NWP-2718J	27	18	.082	2.1	.080	2.0	1.023	26.0	591	880
NWP-3718J	37	18	.082	2.1	.080	2.0	1.140	29.0	771	1147
NWP-4818J	48	18	.082	2.1	.080	2.0	1.293	32.8	973	1447

NWP SERIES OVERALL SHIELDED - 22, 20 and 18 AWG												
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight			
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM		
NWP-722SJ	7	22	.064	1.6	.062	1.6	.480	12.2	143	213		
NWP-1222SJ	12	22	.064	1.6	.062	1.6	.606	15.4	211	314		
NWP-1922SJ	19	22	.064	1.6	.062	1.6	.697	17.7	285	424		
NWP-2722SJ	27	22	.064	1.6	.062	1.6	.823	20.9	375	558		
NWP-3722SJ	37	22	.064	1.6	.080	2.0	.951	24.2	507	754		
NWP-4822SJ	48	22	.064	1.6	.080	2.0	1.070	27.2	622	926		
NWP-6022SJ	60	22	.064	1.6	.080	2.0	1.168	29.7	739	1099		
NWP-720SJ	7	20	.072	1.8	.062	1.6	.520	13.2	180	267		
NWP-1220SJ	12	20	.072	1.8	.062	1.6	.662	16.8	270	402		
NWP-1920SJ	19	20	.072	1.8	.062	1.6	.765	19.4	374	556		
NWP-2720SJ	27	20	.072	1.8	.080	2.0	.943	24.0	534	794		
NWP-3720SJ	37	20	.072	1.8	.080	2.0	1.046	26.6	675	1004		
NWP-4820SJ	48	20	.072	1.8	.080	2.0	1.181	30.0	836	1243		
NWP-6020SJ	60	20	.072	1.8	.080	2.0	1.291	32.8	1001	1490		
NWP-718SJ	7	18	.082	2.1	.062	1.6	.571	14.5	225	335		
NWP-1218SJ	12	18	.082	2.1	.062	1.6	.733	18.6	345	513		
NWP-1918SJ	19	18	.082	2.1	.080	2.0	.886	22.5	518	771		
NWP-2718SJ	27	18	.082	2.1	.080	2.0	1.048	26.6	692	1029		
NWP-3718SJ	37	18	.082	2.1	.080	2.0	1.165	29.6	884	1315		
NWP-4818SJ	48	18	.082	2.1	.080	2.0	1.318	33.5	1103	1641		

The products shown in the following tables are MIL-SPEC only. UL and CSA do not recognize 19 strand conductors in this gauge. See the NWPC table below for UL/CSA.

NWP SERIES UNSHIELDED - 16 AWG										
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight	
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM
NWP-716J	7	16	.091	2.3	.062	1.6	.592	15.0	209	310
NWP-1216J	12	16	.091	2.3	.062	1.6	.772	19.6	332	493
NWP-1916J	19	16	.091	2.3	.080	2.0	.938	23.8	523	777
NWP-2716J	27	16	.091	2.3	.080	2.0	1.117	28.4	712	1059
NWP-3716J	37	16	.091	2.3	.080	2.0	1.247	31.7	932	1387

NWP SERIES OVERALL SHIELDED - 16 AWG												
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight			
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM		
NWP-716SJ	7	16	.091	2.3	.062	1.6	.617	15.7	264	392		
NWP-1216SJ	12	16	.091	2.3	.062	1.6	.797	20.2	407	605		
NWP-1916SJ	19	16	.091	2.3	.080	2.0	.963	24.5	613	912		
NWP-2716SJ	27	16	.091	2.3	.080	2.0	1.142	29.0	823	1224		
NWP-3716SJ	37	16	.091	2.3	.080	2.0	1.272	32.3	1057	1573		

The following cables in 16 gauge are similar to NWP series but utilize materials to qualify for CSA certification for AWM II A/B 105°C service at 300 volts as well as styles 2343 and 2344. Items below are not stocked and are subject to minimum run quantities.

Consult factory for RoHS compliance.

NWPC SERIES UNSHIELDED - 16 AWG										
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight	
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM
NWPC-716J	7	16	.091	2.3	.062	1.6	.592	15.0	209	310
NWPC-1216J	12	16	.091	2.3	.062	1.6	.772	19.6	332	493
NWPC-1916J	19	16	.091	2.3	.062	1.6	.938	23.8	523	777
NWPC-2716J	27	16	.091	2.3	.062	1.6	1.117	28.4	712	1059
NWPC-3716J	37	16	.091	2.3	.062	1.6	1.247	31.7	932	1387

NWPC SERIES OVERALL SHIELDED - 16 AWG												
Part No.	No. of Pairs	Cond. AWG	Cond. Diameter		Jacket Wall		Nominal Diameter		Weight			
			Inches	MM	Inches	MM	Inches	MM	Lbs. per 1000 ft.	KG/KM		
NWPC-716SJ	7	16	.091	2.3	.062	1.6	.617	15.7	264	392		
NWPC-1216SJ	12	16	.091	2.3	.062	1.6	.797	20.2	407	605		
NWPC-1916SJ	19	16	.091	2.3	.062	1.6	.963	24.5	613	912		
NWPC-2716SJ	27	16	.091	2.3	.062	1.6	1.142	29.0	823	1224		
NWPC-3716SJ	37	16	.091	2.3	.062	1.6	1.272	32.3	1057	1573		

UL/CSA -- CONDUCTOR SIZE & STRANDING


16 AWG (26 x 30)

CABLED TWISTED PAIRS CONDUCTORS

Heavy Duty

- Twisted Pairs (NWP Series)
- Mil Spec, U.L. AWM

Recognized Style 2343 or 2344 and
CSA Certified AWM II A/B*

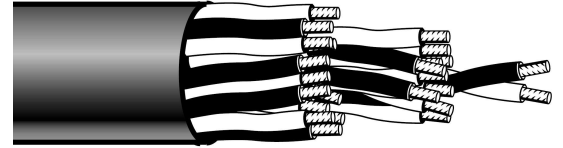

RoHS compliant products available.

Table of Color Codes of Twisted Pairs

PR# PAIR COLORS	PR# PAIR COLORS	PR# PAIR COLORS	PR# PAIR COLORS
1 White with Black	16 Black with Violet	31 Orange with Yellow	46 White /Black Striped Wire with Black
2 White with Brown	17 Black with Gray	32 Orange with Green	47 White/Black Striped Wire with Brown
3 White with Red	18 Brown with Red	33 Orange with Blue	48 White/Black Striped Wire with Red
4 White with Orange	19 Brown with Orange	34 Orange with Violet	49 White/Black Striped Wire with Orange
5 White with Yellow	20 Brown with Yellow	35 Orange with Gray	50 White/Black Striped Wire with Yellow
6 White with Green	21 Brown with Green	36 Yellow with Green	51 White/Black Striped Wire with Green
7 White with Blue	22 Brown with Blue	37 Yellow with Blue	52 White/Black Striped Wire with Blue
8 White with Violet	23 Brown with Violet	38 Yellow with Violet	53 White/Black Striped Wire with Violet
9 White with Gray	24 Brown with Gray	39 Yellow with Gray	54 White/Black Striped Wire with Gray
10 Black with Brown	25 Red with Orange	40 Green with Blue	55 White/Brown Striped Wirewith Black
11 Black with Red	26 Red with Yellow	41 Green with Violet	56 White/Brown Striped Wirewith Brown
12 Black with Orange	27 Red with Green	42 Green with Gray	57 White/Brown Striped Wirewith Red
13 Black with Yellow	28 Red with Blue	43 Blue with Violet	58 White/Brown Striped Wirewith Orange
14 Black with Green	29 Red with Violet	44 Blue with Gray	59 White/Brown Striped Wirewith Yellow
15 Black with Blue	30 Red with Gray	45 Violet with Gray	60 White/Brown Striped Wirewith Green

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com

