

Europe - Flush-Mounting Socket Outlets for Europlugs, 2.5A

Flush-Mounting Mains Socket, 1-Way, without grounding contact, for Euro Plug 2.5 Amp.

Einbausteckdose 1-fach ohne Schutzkontakt, für Eurostecker 2.5 Amp.

SPECIFICATIONS

- Electrical Ratings: 250V AC, 2.5A
- Standards according to: DIN VDE 0620-1, DIN EN 49 440 Part 2
- Material & Type of Terminals: CuZn 37 / CuZn 38, Screw Terminals
- Material of Carrying Parts: Polyamide 6
- Material of Housing: Compression-moulding compound Type 131.5 or phenolic moulding compound Type 31
- RoHS COMPLIANT 2002/96/EC




489K BK



Catalog No.	Color	Description	VPE / Packed	EDP-Nr.
489BK	Black	Flush-Mount Socket for Europlug, without Shutters	300/30 ea	109802
489KBK	Black	Flush-Mount Socket for Europlug, with Shutters	300/30 ea	108528

Rewireable, for flexible supply line H05VV-F 2x1.0mm², or H05VV-F 2x1.5mm²

Wiederanschliessbare Ausführung für flexible Leitungen H05VV-F 2x1.0mm² oder H05VV-F 2x1.5mm²

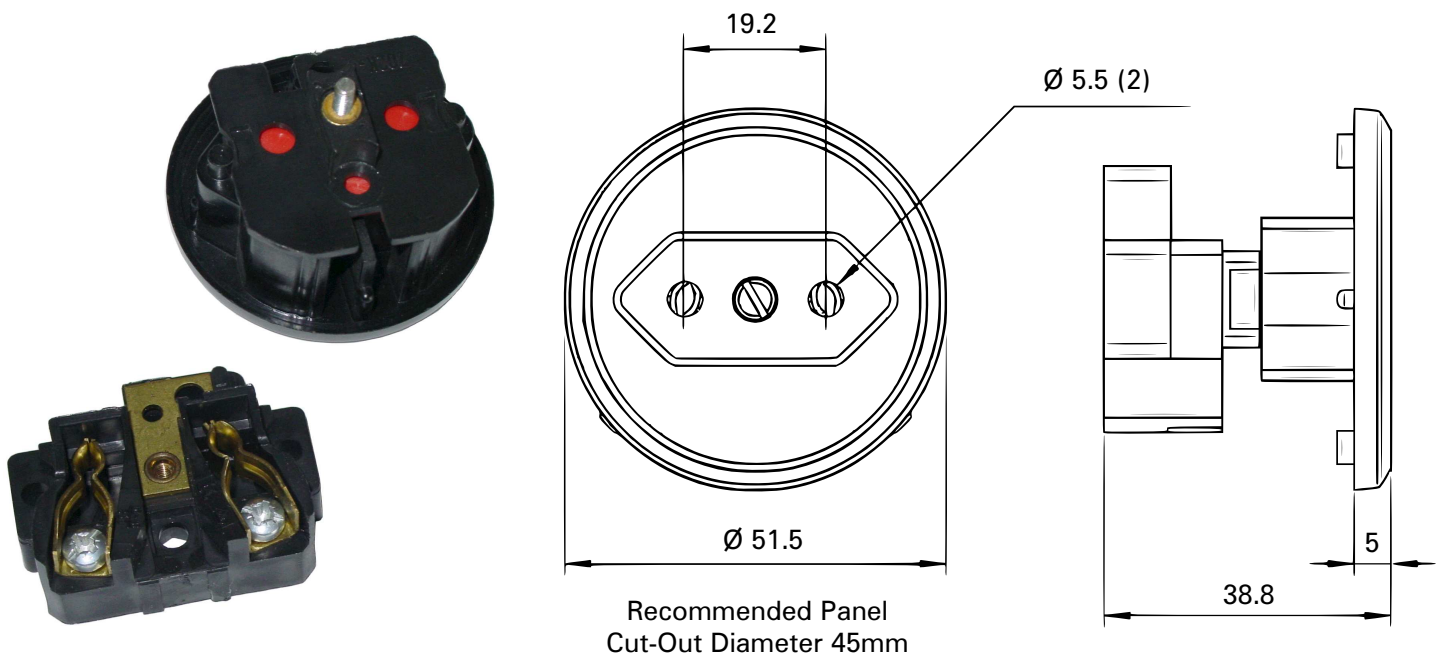

Technical Data are Subject to Change without Notice. Dimensions in mm.