
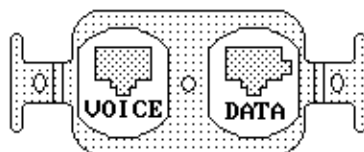


Meets FCC Part 68 requirements

UL Listed
CSA Certified

- | | |
|------------|------------|
| (1) WHITE | (1) BLUE |
| (2) BLACK | (2) ORANGE |
| (3) RED | (3) BLACK |
| (4) GREEN | (4) RED |
| (5) YELLOW | (5) GREEN |
| (6) BLUE | (6) YELLOW |
| | (7) BROWN |
| | (8) SLATE |

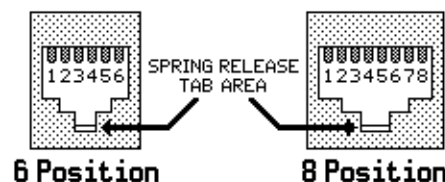

Type 106 Duplex Flush Mount Modular Jacks with 110-Type Termination

The Type 106 duplex jack accommodates two voice and/or data terminals in the same jack location, using standard duplex electrical wallplates. Choice of jacks include 4-, 6-, and 8-conductor modular jacks for voice or data, with 8-conductor keyed versions typically used for data. Mounts easily in standard electrical boxes, most floor monuments, raceways, and many cellular or raised floor boxes without adapters. May be ganged for multiple-port applications. Installation is fast and easy with 110-type insulation displacement connectors for 22-26 AWG inside wiring.

Cat# IVORY	Cat# WHITE	Cat# GRAY	Description
41364-IDI	41364-IDW	41364-IDG	Two 4-Conductor USOC Jacks "LINE 1/LINE 2"
41366-IDI	41366-IDW	41366-IDG	Two 6-Conductor USOC Jacks "LINE 1/LINE 2"
41365-IDI	41365-IDW	41365-IDG	1x6C USOC "VOICE", 1x8C T568B (WECO)C3 "DATA"
41368-IDI	41368-IDW	41368-IDG	Two 8-Conductor USOC Jacks "LINE 1/LINE 2"
41367-IDI	41367-IDW	41367-IDG	2x8C T568B (WECO) Category 3 "LINE 1/LINE2"
41361-IDI	41361-IDW	41361-IDG	Two 8C T568B (WECO) Jacks "VOICE/DATA"
41360-IDI	41360-IDW	41360-IDG	1x8C "VOICE", 1x8C Keyed "DATA", T568B (WECO)