

## Commercial Specification Grade Plugs and Connectors

2 Pole, 3 Wire Grounding  
 NEMA 5-15, 15A 125V  
 NEMA 6-15, 15A 250V  
 NEMA 5-20, 20A 125V  
 NEMA 6-20, 20A 250V  
 NEMA 7-15, 15A 277V



### Vinyl Armored and Rubber Plugs

#### FEATURES

- Solid brass plug blades are firmly embedded in body.
- Terminal screw clamps are designed to contain wire and prevent binding.
- Terminal screws backed out - ready for wiring.
- Terminals in individual chambers to positively insulate conductors.
- Armored housing automatically grounded.
- Combination slot/Phillips head mounting and terminal screws ease installation with power screwdrivers. (Slot/Robertson screws in Canada where available).

#### Vinyl Armored Plugs

Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Catalog No.	
						Plug	Connector
15	125	5-15	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2867	2887
20	125	5-20	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2809	2228
15	250	6-15	Straight	0.25-.0625" (6.35-15.87mm)	Yellow	2866	2227
20	250	6-20	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	3809	2229
15	277	7-15	Straight	0.25-0.625" (6.35-15.87mm)	Yellow	2839*	—



\*Not NOM

#### Thermoplastic Rubber Plugs


Rating A	V/AC	NEMA	Description	Cord Diameter	Color	Catalog No.	
						Plug	Connector
15	125	5-15	Straight	0.25-0.60" (6.35-15.24mm)	Black	1709	222*
15	250	6-15	Straight	0.25-0.60" (6.35-15.24mm)	Black	1711	229†
20	250	6-20	Straight	0.25-0.60" (6.35-15.24mm)	Black	1703	—

\* Not NOM

† Not NOM or CSA

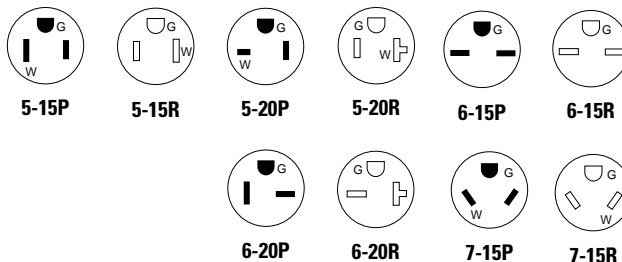

2866



2229



1709



222

INDUSTRIAL  
 COMMERCIAL  
 RESIDENTIAL

## I-16 STRAIGHT BLADE PLUGS AND CONNECTORS

#### TESTING & CODE COMPLIANCE

- Listed to UL 498 (file no. E15012).
- CSA Certified to C22.2 no. 42 (file no. 2081 (6221-02)).
- NOM Certified, except as noted.

#### MATERIAL CHARACTERISTICS

PVC and Thermoplastic Rubber.  
 Environmental:  
 Meets flammability requirements per UL 94, VO rated except 229.  
 Temperature Rating:  
 -20°C to 60°C., except #229:  
 -20°C to 70°C.