

Israel - Snap-In Modular Receptacles, 16 Amp.

Israel

SPECIFICATIONS



- Modular Socket Outlet
- Shuttered for Child Safety
- Meets SI 32 Requirements
- Screw-Type Terminals
- 16 Amp, 250 Volt AC
- 2 Pole 3 Wire Grounding
- Colors: White, Magnesium




572124

Catalog No.	Replaces	Face Color	Country / Current Ratings	Dim. H	Weight/ea	VPE/Packed	EDP-No.
572124	74174*	White	Israel, 16 Amp.	28.5	36 g net.	100/10 ea	125683
572624	-	Magnesium	Israel, 16 Amp.	28.5	36 g net.	100/10 ea	125684

* To be changed in 2010
 Technical Data are Subject to Change without Notice.

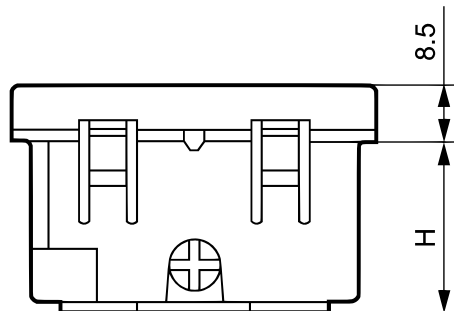

Dimensions in mm

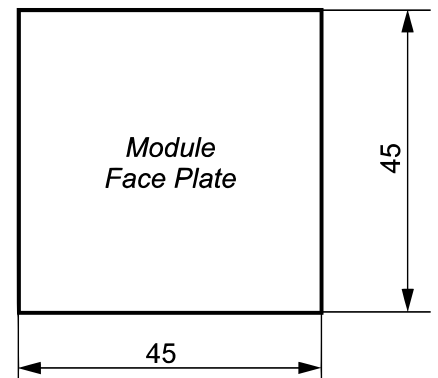

TECHNICAL CHARACTERISTICS

- Mechanical characteristics
 Impact tests: IK 04; Protection by solid bodies/liquids: IP 40 (mounted), IP 20 (alone)
- Material characteristics
 Base: Polypropylene
 Cover plates: Polycarbonate

APPROVALS


- Electrical characteristics
 Self-extinguishing: 650°C / 30s
- Climatic characteristics
 Storage: -10°C to +70°C
 Operating: -5°C to +50°C

CLEANING


Surface cleaning with a cloth. Do not use : acetone, tar remover, trichlorethylene. Resistance to the following cleaning agents: Hexane (EN-60669-1), Methylated spirits, Soapy water, diluted ammonia, diluted pure bleach 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.


Optional Accessories




80291
Thin Wall Support Frame




78880
Splashproof Cover Plate, IP 44




80299
DIN-Rail Support Frame



69651
Surface Mount Box and Cover, IP 55



69580



733892
Surface Mount Metalclad Box