


Argentina - Detachable Power Supply Cords

SPECIFICATIONS

- Molded PVC male grounding plug.
- Straight, with flex strain relief.
- Plug Standard: IRAM 2073
- Receptacle Standard: IEC 60320/C13
- Standard hank packaged
- Approvals: IRAM (male only)
- NOTE: Plug design may vary by manufacturer

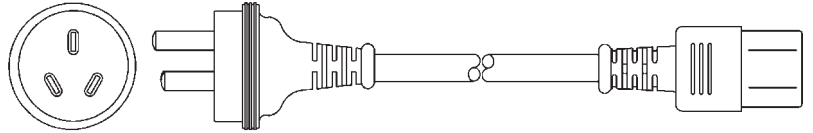


Molded PVC Grounding Plug
(plug design may vary by manufacturer)

Molded PVC Receptacle
IEC 60320/C13
Part No. UC-005I

Catalog No.*	Rating	Color	Plug No.	Wire Type	Color ¹	Nominal \varnothing	2nd End	VPE/Pack	EDP-No.
8965-25M-BB	10A-220V	Black	see above	H05VV-F 3G1.0mm ²	CEE	7.1mm	UC-005I	50 ea	120845

* Catalog No. indicates: **Series - Length Code - Color Code** (e.g. BB = all Black, GG = all Gray)

¹ Conductor Color Code: CEE = Brown, Blue, Green/Yellow

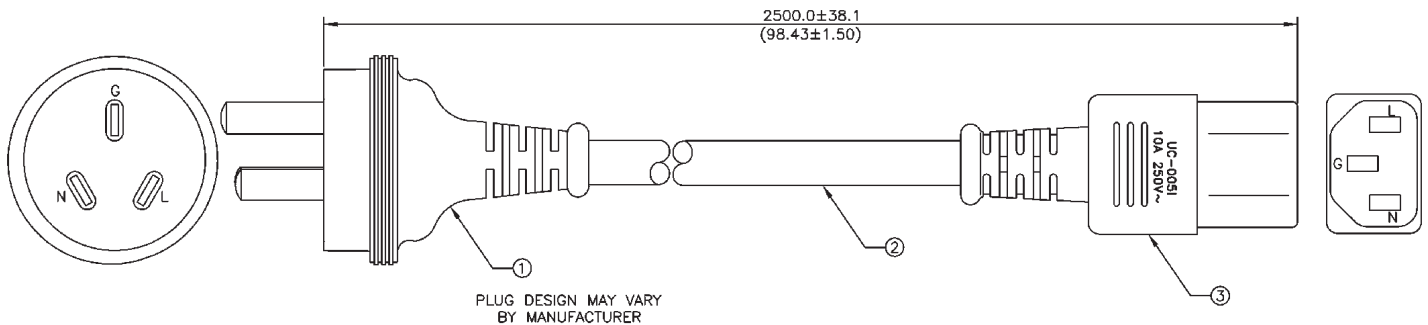

BILL OF MATERIALS					
ITEM	DESCRIPTION	QTY.	PART NO.	VENDOR	REV.
1	BLACK MALE GROUNDING PLUG (IRAM 2073)	1	N/A	N/A	
2	WIRE TYPE: H05VV-F 3G 1.0MM ² 70°C CEE BLACK BC STRANDING (32/0.20 or ALT 40/0.18)	*	N/A	N/A	
3	BLACK FEMALE RECEPTACLE (IEC60320/C13) PHOSPHOROUS BRASS CONTACT	1	UC-005I GEM 98741		

NOTES:

1. ELECTRICAL RATING: 10A/220V
2. APPROVALS MARKS: IRAM (MALE ONLY)

To learn more about B-I-A please visit us at our
WEB site: www.BiaGmbH.com

